


WSPCPD

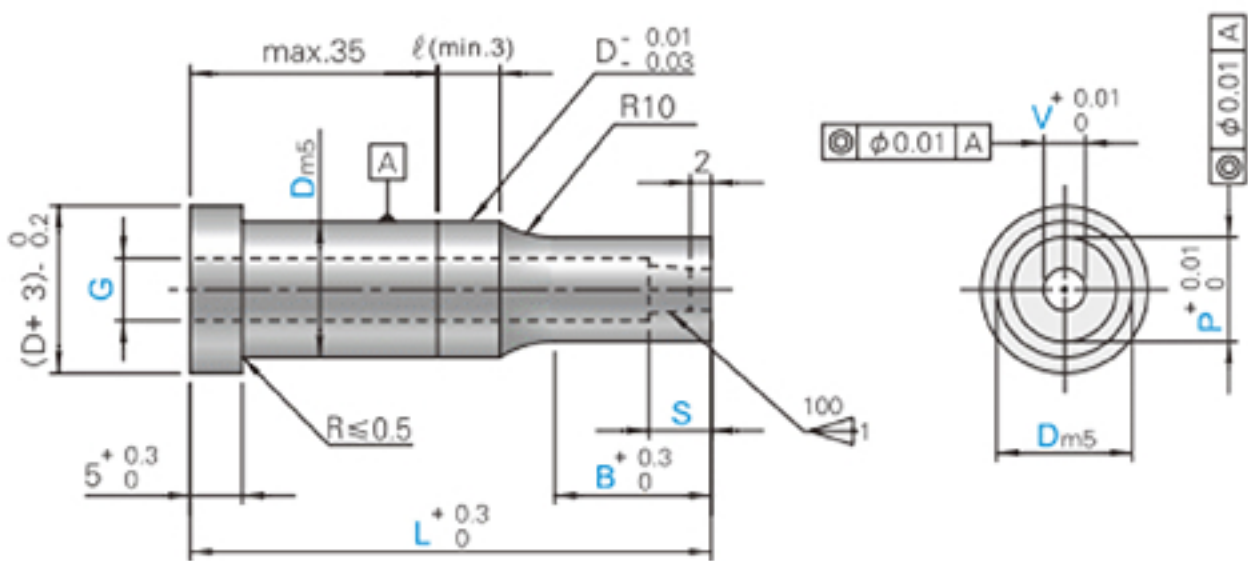

ORDER

Catalog No. - L - P - V - B - S - G
WSPCPD 20 - 55.0 - P14.65 - V7.35 - B8 - S10 - G8.5

SKD11
60~63HRC

Catalog No.		L	P	V min.	V max.	B	S min.	S max.	G	
Type	D									
(Dm5)	8	35.0~60.0	4.80 ~ 7.99	1.50	G-0.5	4.0≤B≤19.0 & B≤L-27	3	(10)	G≤PX0.6 and (P-G)/2≥1.20	0.2mm
WSPCPD	10		4.80 ~ 9.99			4.0≤B≤25.0 & B≤L-27				
	13		5.80 ~ 12.99							
	16		9.80 ~ 15.99							
	20	12.80 ~ 19.99	12							
	25	17.80 ~ 24.99		15						
32	40.0~60.0	19.80 ~ 31.99	7.50							

① Smax.(10)→→ V≤1.99

② P>D-0.03→→ ℓ = 0

ex. Example

