
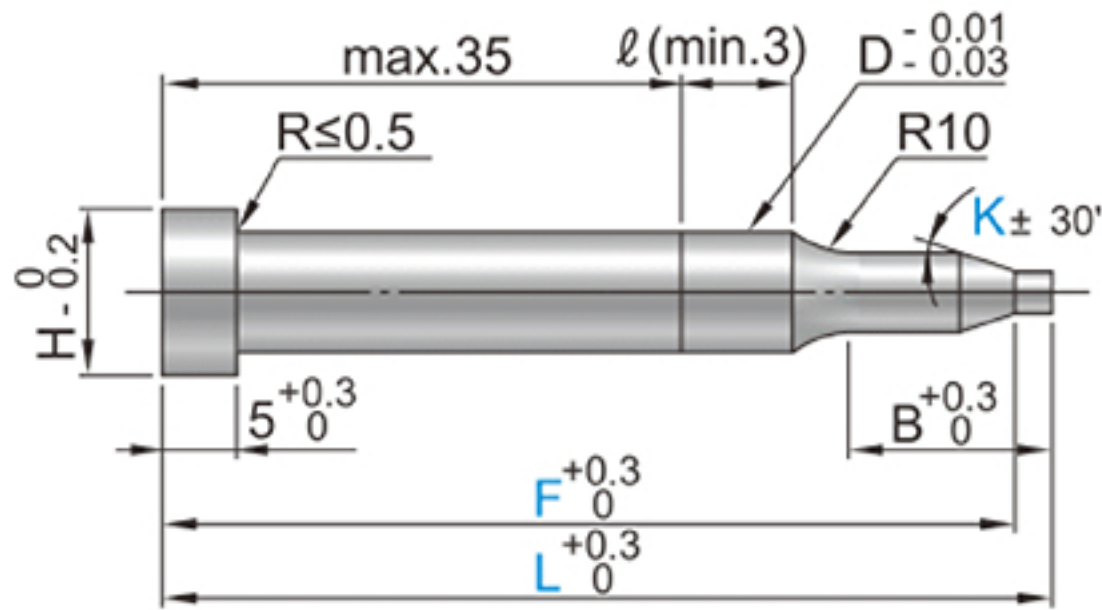


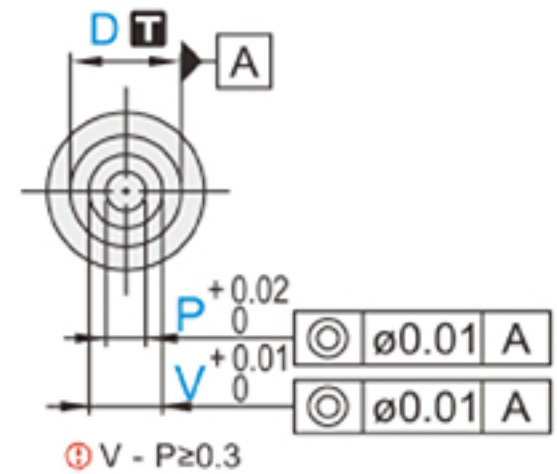

T	M	H	Type		Catalog No. (B) (L>S)
			DLC 3000HV	WPC® 3000HV	
D m5	SKH51	61~64HRC	N-WSHMT	NW-WSHMT	
		64~67HRC	N-WPHMT	NW-WPHMT	
D +0.005/0	SKH51	61~64HRC	AN-WSHMT	ANW-WSHMT	
		64~67HRC	AN-WPHMT	ANW-WPHMT	

ORDER	Catalog No.	0.01mm		0.1mm		1°	
		L	V	P	F	K	
	N-WSHMT 4	41.0	V2.60	P1.00	F39.0	K60°	

Catalog No.			L	V	P min.	F	K	B	H
Type		D							
-DLC N-WSHMT N-WPHMT		4	40.0 ~ 80.0 0.1mm	1.60 ~ 3.99	1.00	F ≤ L-2	0° < K < 90°	8	7
		5		1.80 ~ 4.99	1.20				8
		6		1.80 ~ 5.99	1.20				9
		8		2.10 ~ 7.99	1.50				11
		10		3.00 ~ 9.99	2.50				13
WPC® NW-WSHMT NW-WPHMT		4	50.0 ~ 80.0 0.1mm	1.60 ~ 3.99	1.00			15	7
		5		1.80 ~ 4.99	1.20				8
		6		1.80 ~ 5.99	1.20				9
		8		2.10 ~ 7.99	1.50				11
		10		3.00 ~ 9.99	2.50				13

① V-P ≥ 0.3

② B ≥ (L-F) + { (V-P)/2tanK } + 2

