
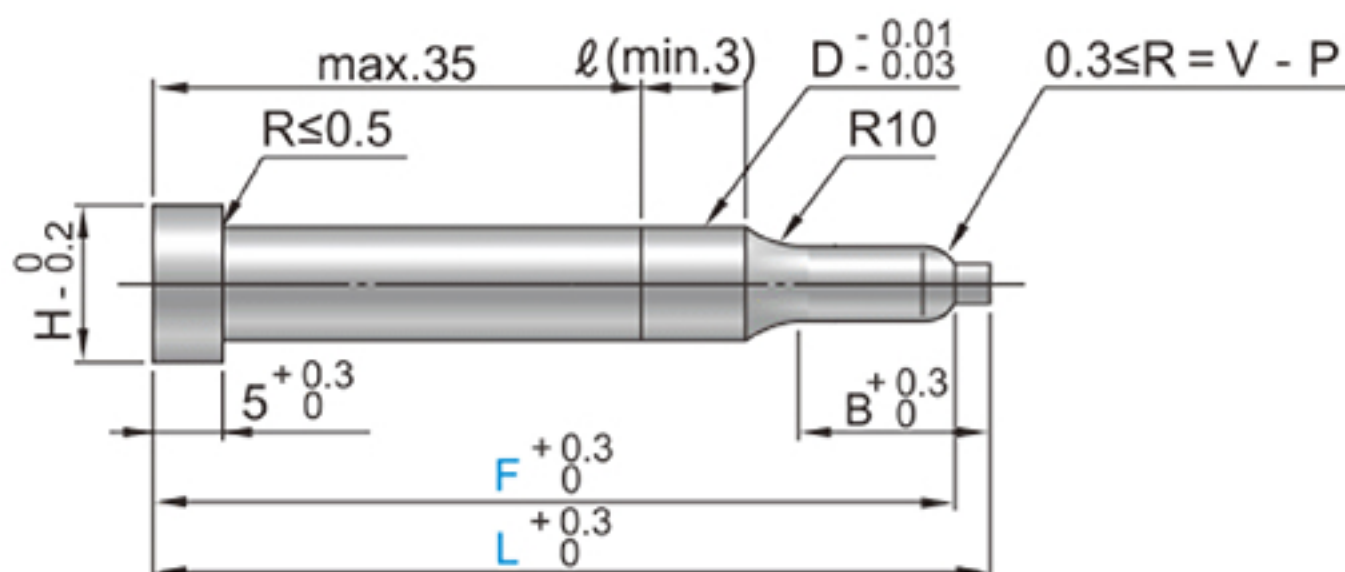


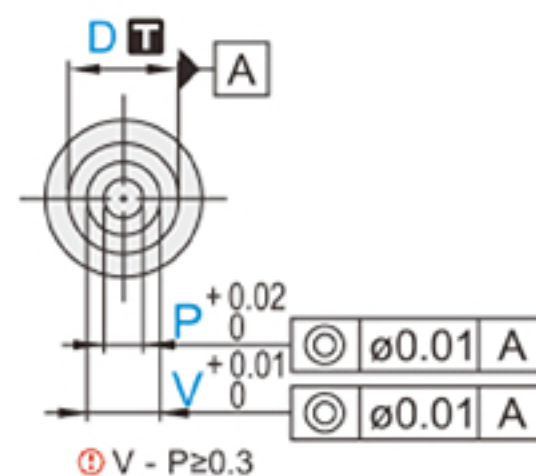

T	M	H	Type		Catalog No. (B) (L > S)
			DLC 3000HV以上	WPC 3000HV	
D m5	SKH51	61~64HRC	N-WSHMS	NW-WSHMS	S
		64~67HRC	N-WPHMS	NW-WPHMS	
D +0.005/0	SKH51	61~64HRC	AN-WSHMS	ANW-WSHMS	L
		64~67HRC	AN-WPHMS	ANW-WPHMS	

ORDER	Catalog No.	L	V	P	F
	N-WSHMS 4	41.0	V2.60	P1.00	F39.0

Catalog No.		D	L	V	P min.	F	B	H
Type								
-DLC N-WSHMS N-WPHMS	AN-WSHMS AN-WPHMS	4	40.0 ~ 80.0 0.1mm	1.60 ~ 3.99	1.00	F ≤ L-2	8	7
		5		1.80 ~ 4.99	1.20			8
		6		1.80 ~ 5.99	1.20			9
		8		2.10 ~ 7.99	1.50			11
		10		3.00 ~ 9.99	2.50			13
WPC NW-WSHMS NW-WPHMS	ANW-WSHMS ANW-WPHMS	4	50.0 ~ 80.0 0.1mm	1.60 ~ 3.99	1.00		15	7
		5		1.80 ~ 4.99	1.20			8
		6		1.80 ~ 5.99	1.20			9
		8		2.10 ~ 7.99	1.50			11
		10		3.00 ~ 9.99	2.50			13

① V-P ≥ 0.3 ② $B \geq (L - F) + \sqrt{(V - P)((V - P) - (V - P)/4)} + 2$

