


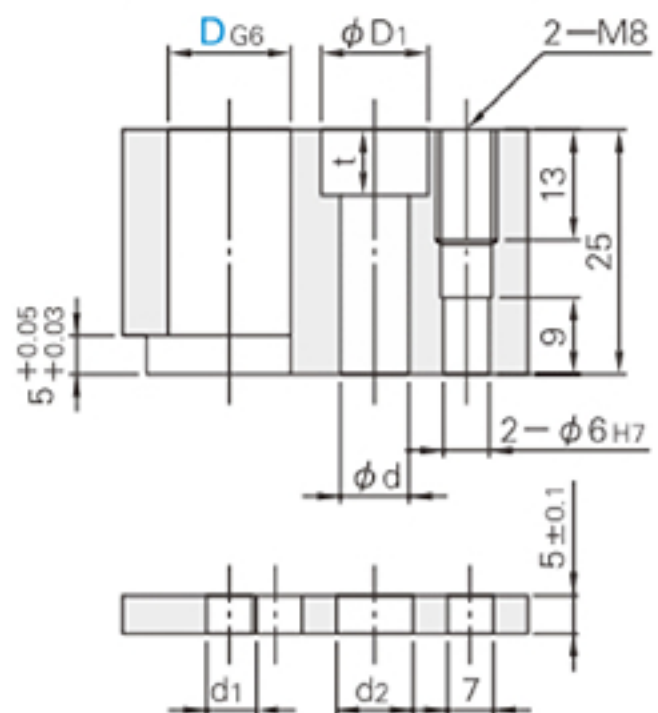
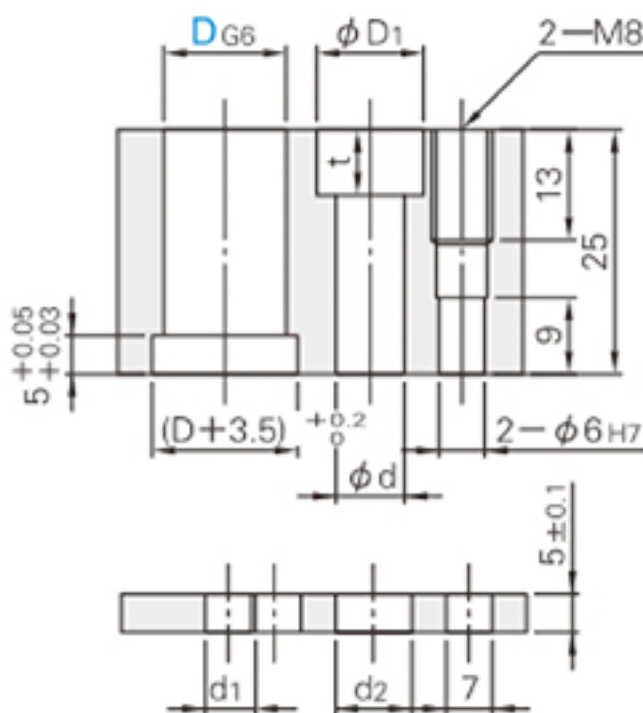


W25CRN-AP
W25CRNAR
WCRNBP
W25CRN-AD
WCRNBD
W25CRN-A
W25CRN-FP
W25CRNFR
W25CRN-FD
W25CRN-F

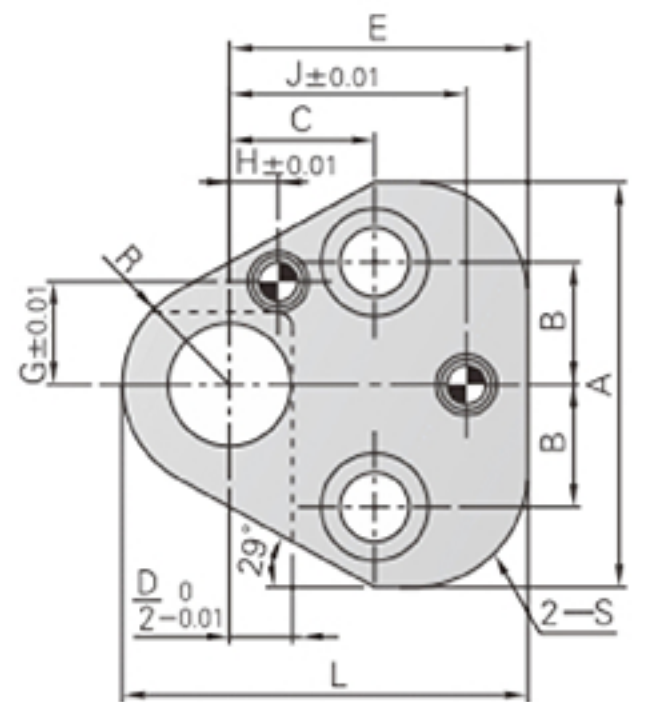

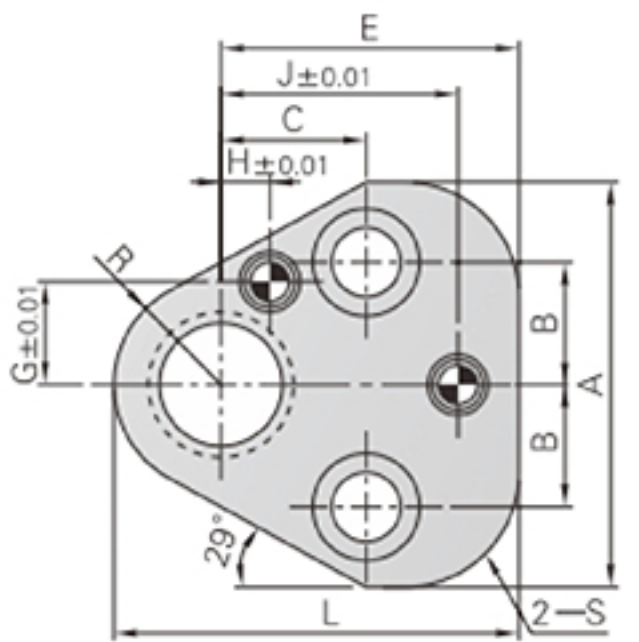

Catalog No.	No.	①	②	③	④	⑤
W25CRN-AP	NA1	○	○	○	○	○
W25CRNAR	NA2	○	○	○	○	○
WCRNBP	—	○	○	○	○	○
W25CRN-AD	—	○	○	○	○	○
WCRNBD	—	○	○	○	○	○
W25CRN-A	NA3	○	○	○	○	○

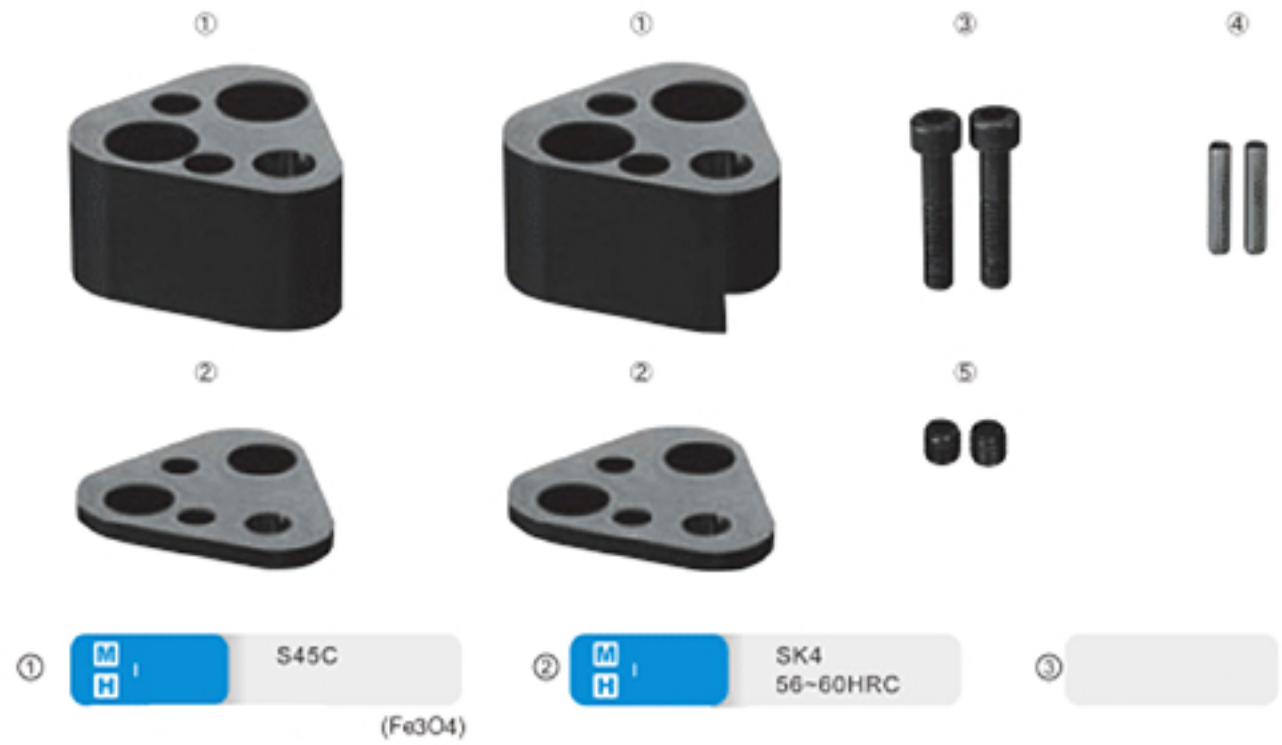

Catalog No.	No.	①	②	③	④	⑤
W25CRN-FP	NF1	○	○	○	○	○
W25CRNFR	NF2	○	○	○	○	○
WCRNBP	—	○	○	○	○	○
W25CRN-FD	—	○	○	○	○	○
WCRNBD	—	○	○	○	○	○
W25CRN-F	NF3	○	○	○	○	○



Catalog No.
W25CRN-AP 16

Catalog No.		D	D _{g6}	A	B	C	E	G	H	J	L	R	S	D ₁	d	t	d ₂	d ₁		A
Type																		WCRNBP	WCRNBD	
W25CRN-AP ①②③④⑤	W25CRN-FP ①②③④⑤	10	+0.014 +0.005	43.7	11.12	19.05	35.0	9.0	7.5	26.925	44.5	9.5	12.0	14	9	9	10	6.2	7.4	③M8-35 ④MSTM6-30 ⑤MSW8
W25CRNAR ①③④⑤	W25CRNFR ①③④⑤	13	+0.017	50.0	14.27		38.1	12.0	6.5	29.970	50.8	12.7	15.2						9.4	
WCRNBP ②	WCRNBP ②	16	+0.006	53.2	15.87		39.7	13.5	6.0	31.750	54.0	14.3	16.8						11.6	
W25CRN-AD ①②③④⑤	W25CRN-FD ①②③④⑤	20	+0.020 +0.007	59.5	17.47	42.8	16.5	5.0	33.530	60.3	17.5	20.0	17	11	11	12	13.6		③M10-35 ④MSTM6-30 ⑤MSW8	
WCRNBD ②	WCRNBD ②	25		69.1	19.84	23.82	47.7	22.0	7.0	40.640	69.9	22.2	24.7	19	13	14	14		17.6	③M12-35 ④MSTM6-30 ⑤MSW8
W25CRN-A ①	W25CRN-F ①																			

Using Features :

1. It is widely Apply to mould manufacturing and processing industries.
2. The round shape is matched with the round blade punch without stopping surface, and the non-circular shape is matched with the shoulder belt stopping surface punch.
3. Comply with the upgraded RoHS2.0 ten material environmental protection standards.

