








WHDP-AP
WHDPAR
WBPC
WHDP-AN
WHDP-FP
WHDPFR
WHDP-FN



① SCM440
36~44HRC
(Fe3O4)

② SCM440
56~60HRC

③

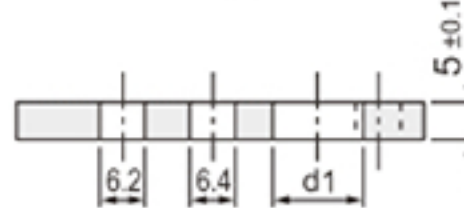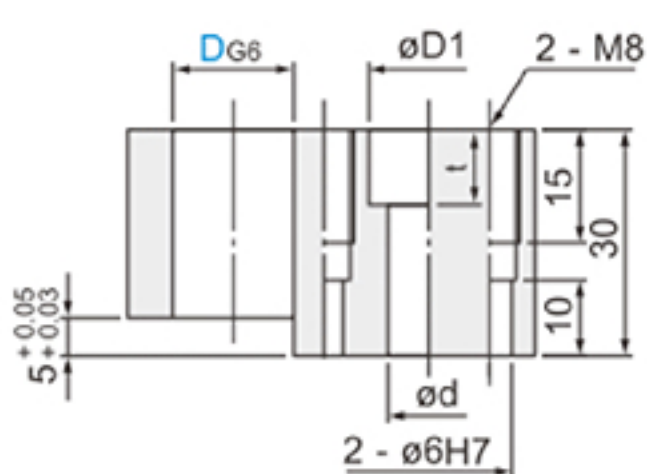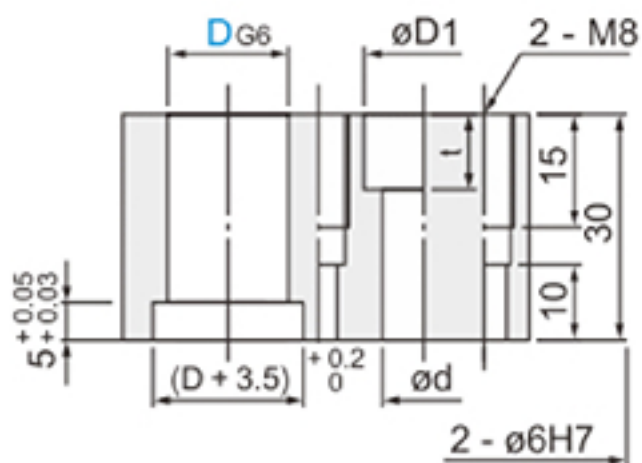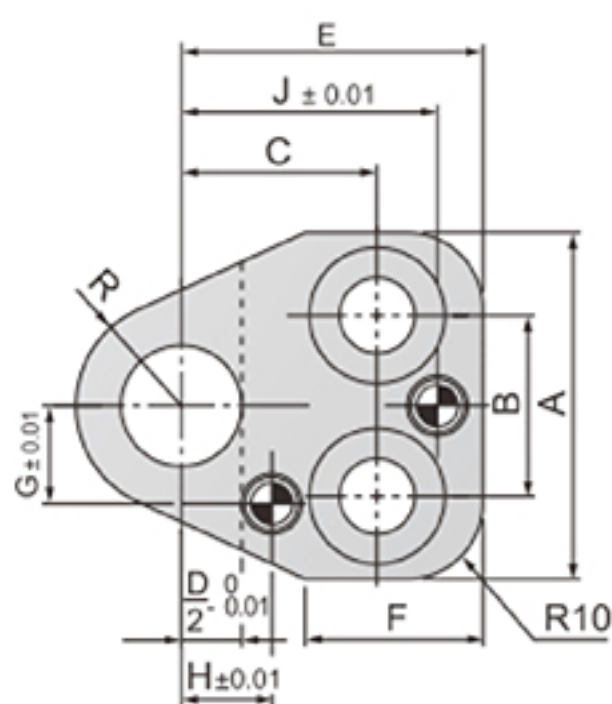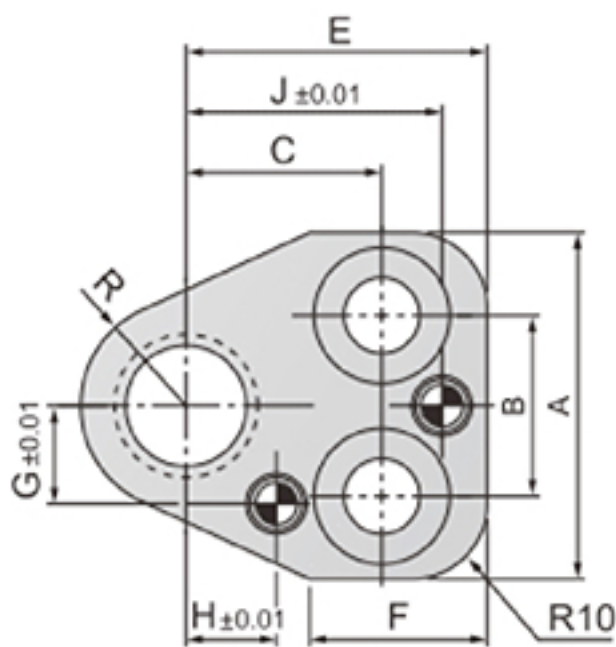




Catalog No.	①	②	③	④	⑤
WHDP-AP	○	○	○	○	○
WHDPAR	○		○	○	○
WBPC		○			
WHDP-AN	○				



Catalog No.	①	②	③	④	⑤
WHDP-FP	○	○	○	○	○
WHDPFR	○		○	○	○
WBPC		○			
WHDP-FN	○				



ORDER

Catalog No.
WHDP-AP 25

Catalog No.		D	D ₀₆	A	B	C	E	F	G	H	J	R	D ₁	d	t	d ₁	A	
Type																		
WHDP-AP ①②③④⑤	WHDP-FP①②③④⑤	10	+0.014 +0.005	37	20	21	35	20	10	9	29	9.5	14	9	10	10	③M8 - 40 ④MSTM6 - 30 ⑤MSW8	
WHDPAR ①②③④	WHDPFR ①②③④	13	+0.017	43	26	23	38		13	11	32	12						
WBPC ②	WBPC ②	16	+0.006	44	24	26	40			12	34	14						
WHDP-AN ①	WHDP-FN①	20	+0.020	48	28	27	42			16	14	36	17	17	11	12	12	③M10 - 40 ④MSTM6 - 30
		25	+0.007	50	30	30	46			18	17	39	19.5					⑤MSW8

Using Features :

1. It is widely Apply to mould manufacturing and processing industries.
2. The round shape is matched with the round blade punch without stopping surface, and the non-circular shape is matched with the shoulder belt stopping surface punch.
3. Comply with the upgraded RoHS2.0 ten material environmental protection standards.

