



WBPN-LR
WBDN-LR
WBNN-BR




WBPN-LR

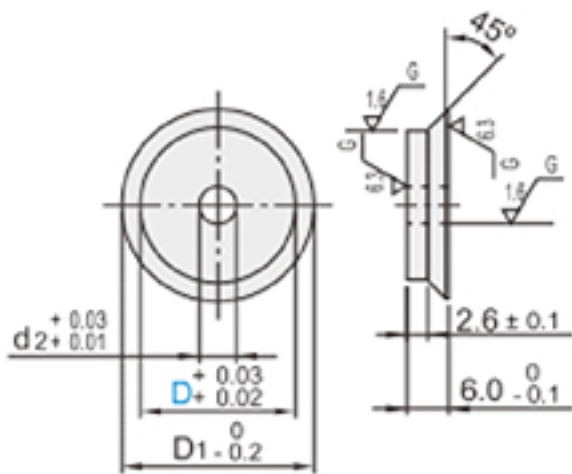

WBDN-LR

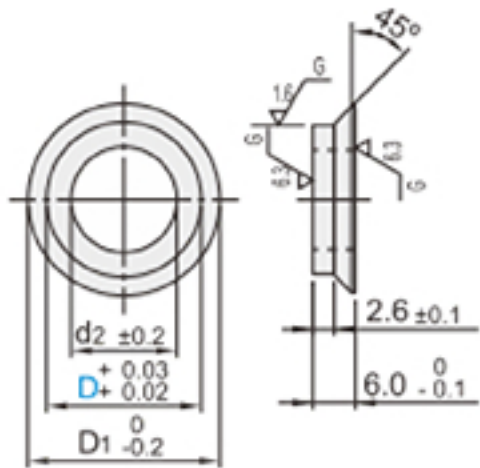

WBNN-BR

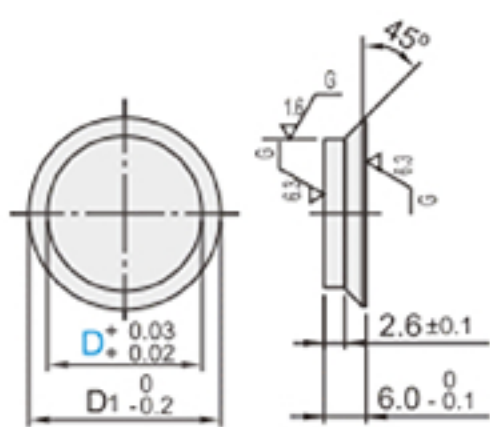

ORDER

Catalog No.
WBPN-LR 25



SK4
56-60HRC

Catalog No.				D1	d2
Type	D				
WBPN-LR	10	WCRN - P WBRN - P WCLN - P WCBN - P WCCRN	WCLN - PS WCLN - FS WLRGD - L/R WBRGD - L/R	16	6
	13			19	
	16			22	
	20			26	
	25			31	
	32			38	
	32			38	
WBDN-LR	13	WCRN - D WCLN - D		19	6.2
	16			22	9
	20			26	12
	25			31	17
	32			38	21
	38			44	27
	38			44	27
WBNN-BR	10	WBRN - P WCBN - PN		16	—
	13			19	
	16			22	
	20			26	
	25			31	
	32			38	
	32			38	



Catalog No.		
Type	D	
WBB 8	10~38	WCLN - P WCRN - P WCCRN WCLN - PS WCLN - FS WCLN - D WCRN - D
WBB 10	10	WCBN - P WCRN - P WCBN - PN WBRN - PN
WBB 13	13~32	

Catalog No.		
Type	D	
WBF 8	10~38	WCLN - P WCRN - P WCCRN WCLN - PS WCLN - FS WCLN - D WCRN - D
WBF 10	10	WCBN - P WCRN - P WCBN - PN WBRN - PN
WBF 13	13~32	

Using Features :

- 1. It is widely Apply to mould manufacturing and processing industries.
- 2. The round shape is matched with the round blade punch without stopping surface, and the non-circular shape is matched with the shoulder belt stopping surface punch.
- 3. Comply with the upgraded RoHS2.0 ten material environmental protection standards.

