
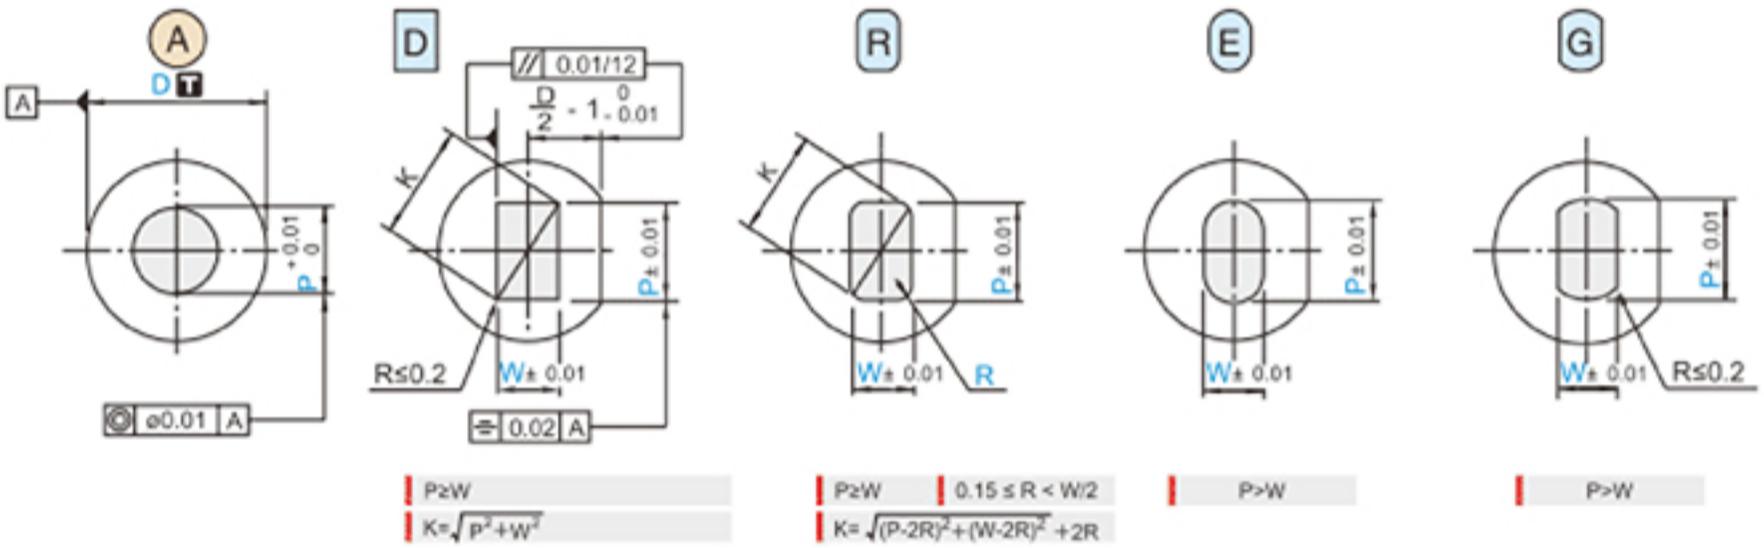


P	B
0.30 ~ 0.49	1
0.50 ~	2

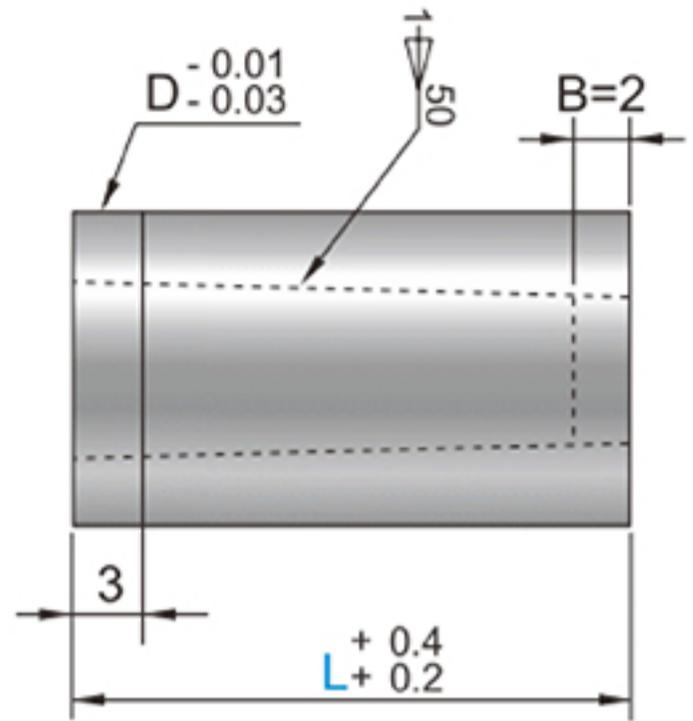

D	Material	Hardness	Diameter	Type		Catalog No.
				WASD	WPASD	
D n5	SKH51	61-64HRC	D3-5	⊗	WASD	
	SKD11	60-63HRC	D6-25	⊗ ⊗ ⊗ ⊗	WASDD	
			D8-25	⊗	WPASD	
			D3-25	⊗ ⊗ ⊗ ⊗	WPASDD	
		64-67HRC	D8-25			

ORDER Catalog No. - L - P - W - R (R) 0.01mm

WASDE 8 - 20 - P3.80 - W2.00

D	n5	Tolerance	Catalog No.		L	A	D	E	R	G	R	
			Type	D								P
3	+0.008 +0.004	+0.005	(SKH51) (D n5)	3	8-13	0.30 ~ 0.70	-	-	-	-	-	
4	⊗ WASD ⊗ WPASD		(SKD11) (D n5)	4	8-13-16-20-22-25-30	0.50 ~ 1.50	-	-	-	-	-	
5				5	16-20-22-25-30	0.50 ~ 2.50	-	-	-	-	-	
6				6	-	1.00 ~ 3.00	-	-	-	-	-	
8	+0.016 +0.010	-	⊗ WASDD ⊗ WPASDD	8	16-20-22-25-30-35	1.00 ~ 4.00	4.00	1.00	-	-	0.15	
10	+0.013 +0.010		⊗ WASDR ⊗ WPASDR	10		2.00 ~ 6.00	6.00	1.20	-	-	-	
13	+0.020 +0.012		⊗ WASDE ⊗ WPASDE	13		3.00 ~ 8.00	8.00	1.50	-	-	-	
16			⊗ WASDG ⊗ WPASDG	16		5.00 ~ 10.00	10.00	2.00	-	-	-	
20	+0.024 +0.015			20		7.00 ~ 12.00	12.00	2.00	-	-	-	
25				25		10.00 ~ 16.00	16.00	2.00	-	-	-	(R)