

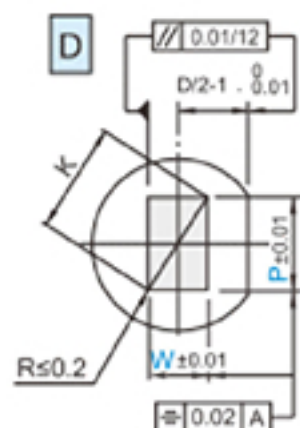
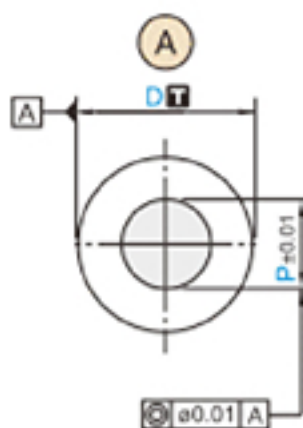
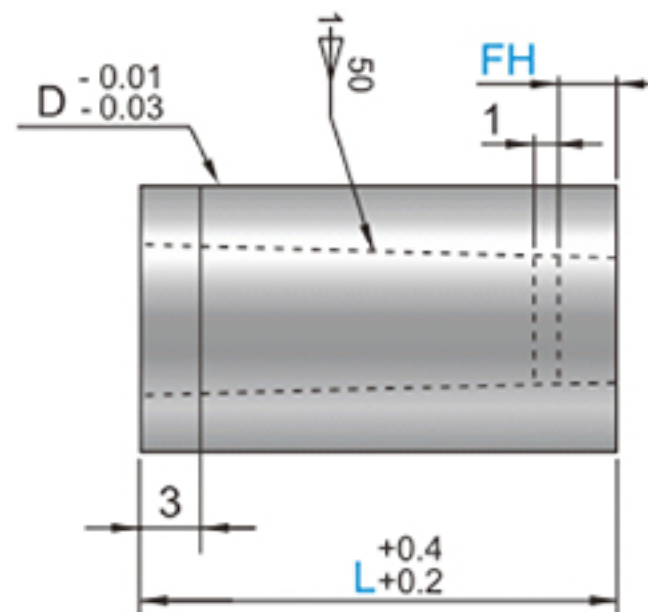


SRT-WASD
 SRT-WASD□
 SRT-WPASD
 SRT-WPASD□
 SRТА-WASD
 SRТА-WASD□
 SRТА-WPASD
 SRТА-WPASD□

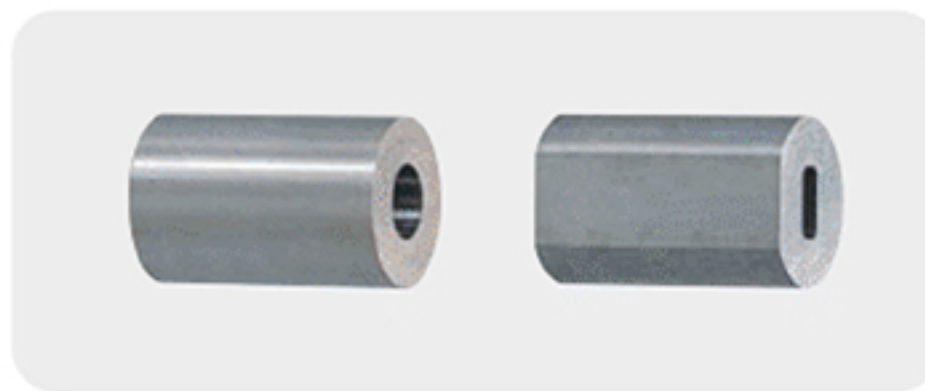

$$P \geq W \quad K = \sqrt{P^2 + W^2}$$

$$P - 0.4 \geq 1.5$$

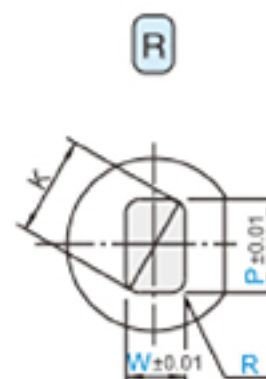

$$P \geq W \quad 0.15 \leq R < W/2$$

$$K = \sqrt{(P-2R)^2 + (W-2R)^2} + 2R$$

$$P - 2R \geq 1.5$$



$$P > W$$



$$P > W$$

$$\sqrt{P^2 - W^2} \geq 1.5$$

				Catalog No.
T	M	H	D	Type
D _{n5}	SKH51	61~64HRC	D5	⊗ SRT-WASD
	SKD11	60~63HRC	D6~25	⊗ ⊗ ⊗ ⊗ SRT-WASD□
		64~67HRC	D4~25	⊗ SRT-WPASD
			D6~25	⊗ ⊗ ⊗ ⊗ SRT-WPASD□
D ^{+0.005} ₀	SKH51	61~64HRC	D5	⊗ SRТА-WASD
	SKD11	60~63HRC	D6~16	⊗ ⊗ ⊗ ⊗ SRТА-WASD□
			D8~16	⊗ SRТА-WPASD
		64~67HRC	D5~16	⊗ ⊗ ⊗ ⊗ SRТА-WPASD□



ORDER

0.01mm

0.005mm

0.1mm

Catalog No.


- L - P - W - R (R) - MT - C - TS - FH

SRT-WASDE 8 - 20 - P3.80 - W2.00 - MT1.50 - C0.105 - H - FH2.0

D			Catalog No.		L	(A)	DERG			(R)	MT	C	TS	FH		
D	n5	+0.005 0	Type	D		P	PKmax	P.Wmin		R						
5	+0.013 +0.008	+0.005 0	(D n5) (SKH51) (D*0.005) A SRT-WASD SRТА-WASD	5	16-20-22-25-30	2.00 ~ 2.50	—	—	0.15 ~ W/2	(R)	MT ≥ 0.5	C ≥ 0.060		1.0~3.0		
6			(D n5) (SKD11) (D*0.005) A SRT-WASD SRТА-WASD	6	16-20-22-25-30-35	2.00 ~ 3.00	—	—								
8	+0.016		A SRT-WASD SRТА-WASD	8		2.00 ~ 4.00	4.00	2.00								
10	+0.01		B SRT-WASDD SRТА-WASDD	10		2.00 ~ 6.00	6.00	2.00								
13	+0.02		B SRT-WASDD SRТА-WASDD	13		3.00 ~ 8.00	8.00	2.00								
16	+0.012		B SRT-WASDR SRТА-WASDR	16		5.00 ~ 10.00	10.00	2.00								
(20)	+0.024		B SRT-WASDE SRТА-WASDE	(20)		7.00 ~ 12.00	12.00	3.00								
(25)	+0.015		B SRT-WASDG SRТА-WASDG	(25)		10.00 ~ 16.00	16.00	3.00								
5	+0.013 +0.008		(D n5) (D*0.005) A SRT-WPASD SRТА-WPASD	5	16-20-22-25-30	2.00 ~ 2.50	—	—				C≥0.060)				
6			(D n5) (D*0.005) A SRT-WPASD SRТА-WPASD	6	16-20-22-25-30-35	2.00 ~ 3.00	—	—								
8	+0.016		A SRT-WPASD SRТА-WPASD	8		2.00 ~ 4.00	4.00	2.00								
10	+0.01		B SRT-WPASDD SRТА-WPASDD	10		2.00 ~ 6.00	6.00	2.00								
13	+0.02		B SRT-WPASDD SRТА-WPASDD	13		3.00 ~ 8.00	8.00	2.00								
16	+0.012		B SRT-WPASDR SRТА-WPASDR	16		5.00 ~ 10.00	10.00	2.00								
(20)	+0.024		B SRT-WPASDE SRТА-WPASDE	(20)		7.00 ~ 12.00	12.00	3.00								
(25)	+0.015		B SRT-WPASDG SRТА-WPASDG	(25)		10.00 ~ 16.00	16.00	3.00								

D=(20)(25)

	(N/mm²)
H	800 ~
M	600 ~
L	~ 599

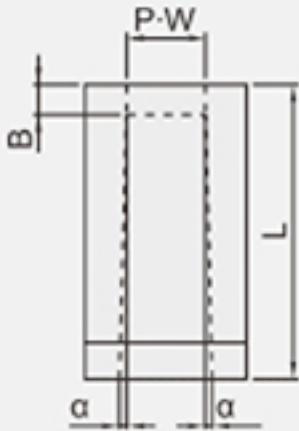

L	1/50	1/100	1/150
16	0.28	0.14	0.09
20	0.36	0.18	0.12
22	0.40	0.20	0.13
25	0.46	0.23	0.15
30	0.56	0.28	0.19
35	0.66	0.33	0.22
40	0.76	0.38	0.25

