



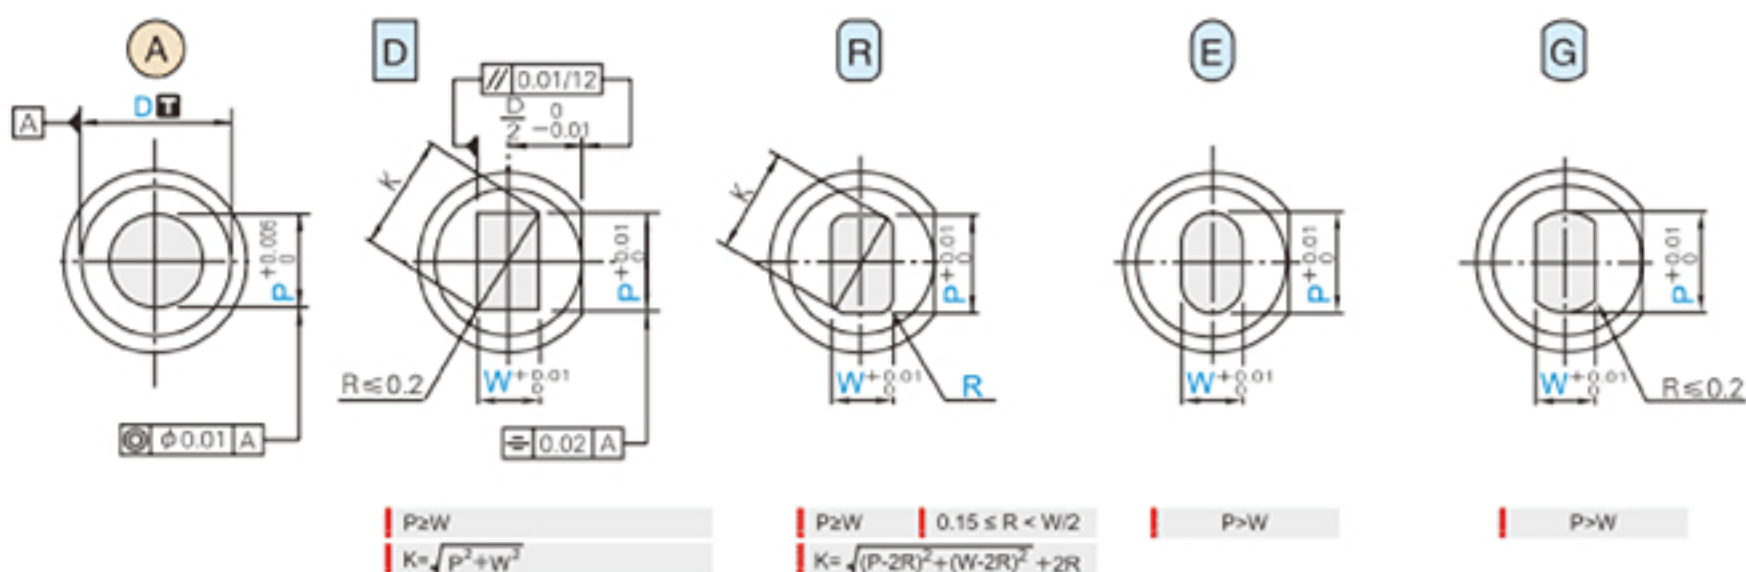



			Catalog No.
T	M	H	Type
D mS	V40(HIP)	87~88HRA	Ⓐ WWHD
$D^{+0.005}_0$			Ⓐ WWHD □
			Ⓐ A-WWHD
			Ⓐ A-WWHD □

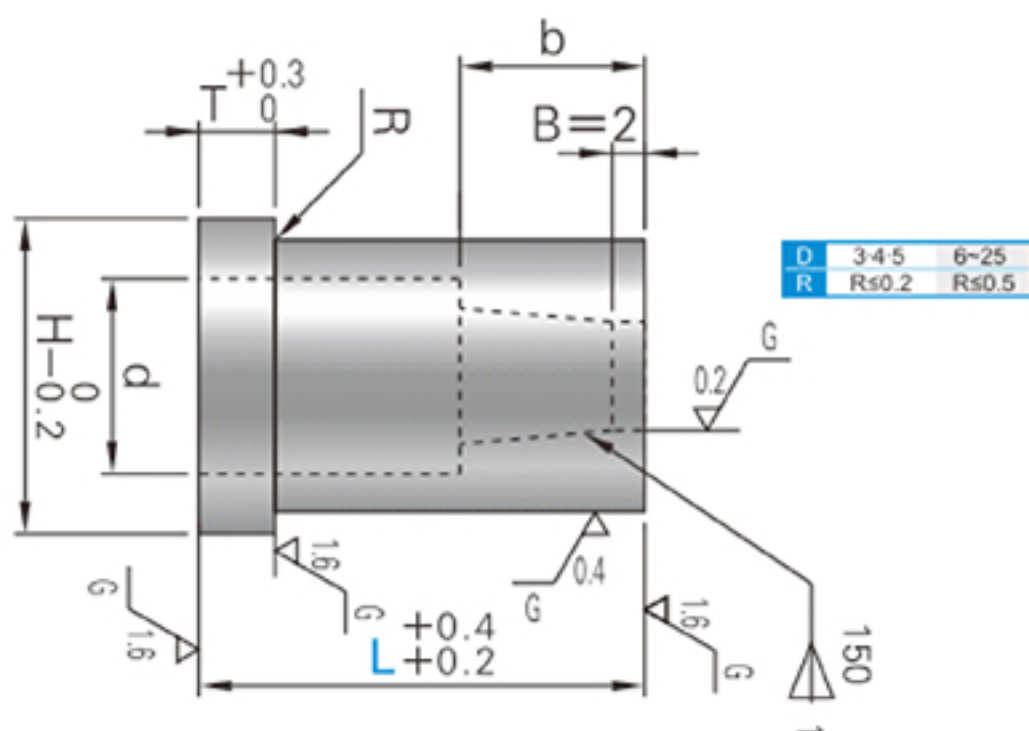


 **ORDER** Catalog No. - L - P - W - R (R)
WWHD 13 - 30 - P7.00

D	Catalog No.	L	(A)	(D) (E) (R) (G)	(R)	b	d	H	T
m5	Type	D	P	P-K max.	P-Wmin.	R			
+0.006 +0.002	(D m5)	(3)	0.50 ~ 1.00	—	—		1.4	4	
+0.009 +0.004	(D ^{+0.005})	(4)	0.50 ~ 1.50	—	—	0.2	2.0	5	3
	(5)	16	0.50 ~ 2.50	—	—	—	3.0	6	
	WWHD	6	1.00 ~ 3.00	3.00	1.00	W/2	3.4	9	
	A-WWHD	8	1.00 ~ 4.00	4.00	1.00	以下	4.4	11	
	WWHDD	10	2.00 ~ 6.00	6.00	1.20		6.4	13	5
	A-WWHDD	13	3.00 ~ 8.00	8.00	1.50		8.4	16	
	WWHDR	16	5.00 ~ 10.00	10.00	2.00	仅 (R)	10.6	19	
	A-WWHDR	20	7.00 ~ 12.00	12.00	2.00		12.6	23	
	WWHDE	25	10.00 ~ 16.00	16.00	2.00		16.6	28	
	A-WWHDE								
	WWHDG								
	A-WWHDG								

① D = (3)(4)(5)
① L(30)~(35) → DB-25



	(A°)
1/50	1.146°
1/100	0.573°
1/150	0.382°

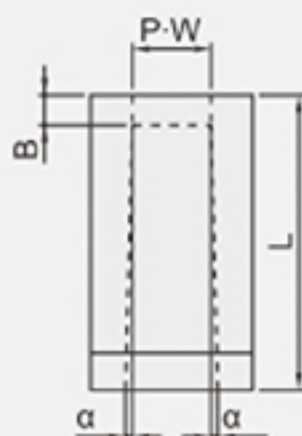

(α×2)

(B=2)

L	精度值	1/50	1/100	1/150
16		0.28	0.14	0.09
20		0.36	0.18	0.12
22		0.40	0.20	0.13
25		0.46	0.23	0.15
30		0.56	0.28	0.19
35		0.66	0.33	0.22
40		0.76	0.38	0.25

