



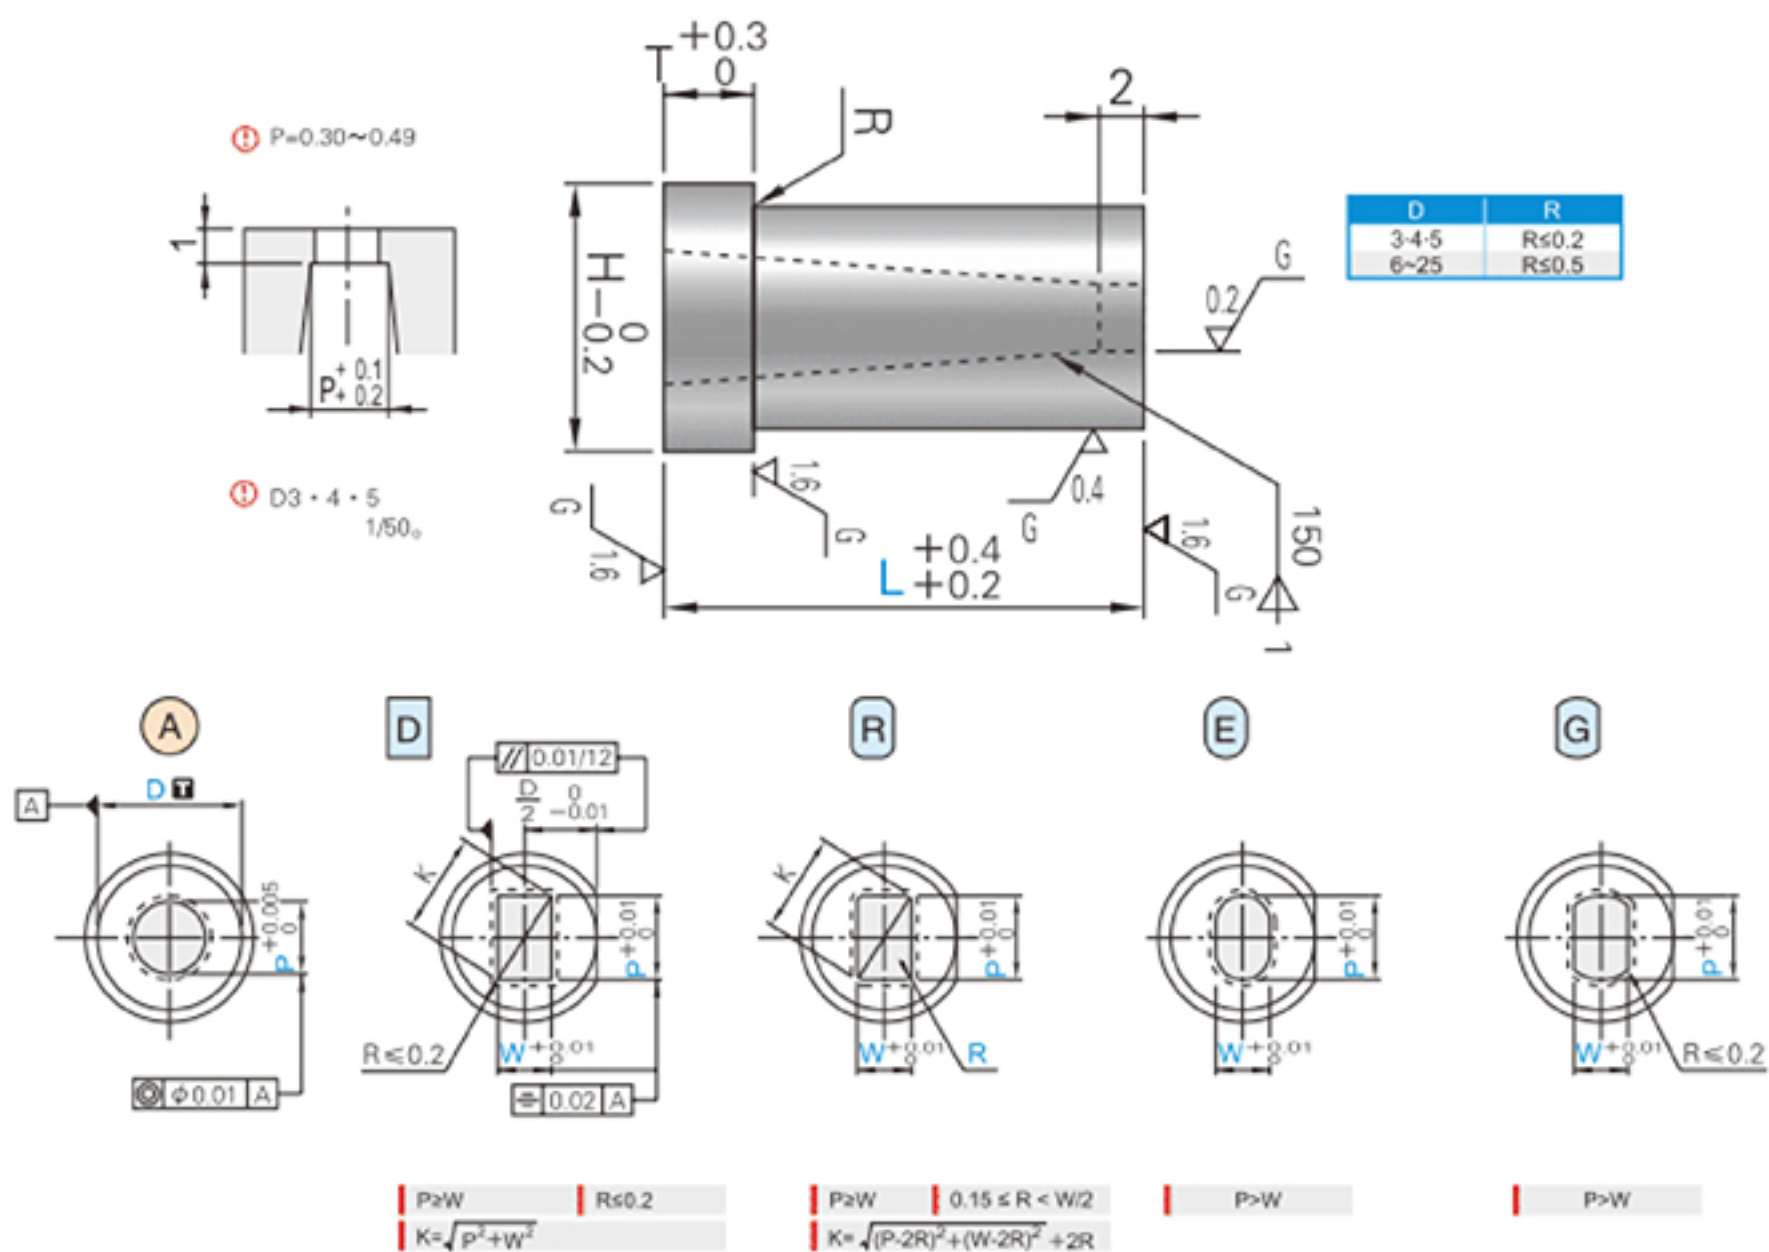


			Catalog No.	
T	M	H	Type	
D m5	V40(HIP)	87~88HRA	Ⓐ	WWAHD
			Ⓐ Ⓑ Ⓒ Ⓓ	WWAHD□
D +0.005 0			Ⓐ	A-WWAHD
			Ⓐ Ⓑ Ⓒ Ⓓ	A-WWAHD□


 **ORDER** Catalog No. - L - P - W - R (R)
WWAHD 13 - 30 - P7.00

D公差	Catalog No.		L	(A)	D E R G	R	H	T
m5	Type	D		P	P-K max.	P-Wmin.	R	
+0.006 +0.002	(D m5)	(3)		0.50 ~ 1.00	—	—	—	4
		(4)	13	0.50 ~ 1.50	—	—	—	5
+0.009 +0.004		(5)	16	0.50 ~ 2.50	—	—	—	6
	Ⓐ WWAHD Ⓐ A-WWAHD	6	20	1.00 ~ 3.00	3.00	1.00	0.2	9
	Ⓑ WWAHDD Ⓑ A-WWAHDD	8	22	1.00 ~ 4.00	4.00	1.00	~	11
+0.012 +0.006	Ⓒ WWAHDR Ⓒ A-WWAHDR	10	25	2.00 ~ 6.00	6.00	1.20	W/2	13
	Ⓓ WWAHDE Ⓓ A-WWAHDE	13	(30)	3.00 ~ 8.00	8.00	1.50	以下	16
+0.015 +0.007	Ⓔ WWAHDG Ⓔ A-WWAHDG	16	(35)	5.00 ~ 10.00	10.00	2.00	α (R)	19
		20		7.00 ~ 12.00	12.00	2.00		23
+0.017 +0.008		25		10.00 ~ 16.00	16.00	2.00		28

① D = (3)(4)(5)
② L(30) • (35) → D8~25



	(A°)
1/50	1.146°
1/100	0.573°
1/150	0.382°

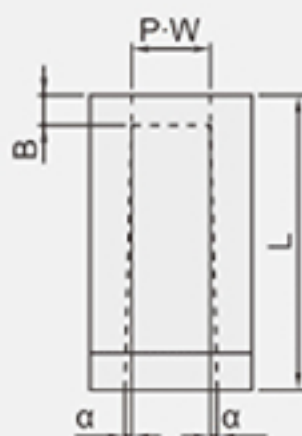

(α×2)

(B = 2)

L	1/50	1/100	1/150
16	0.28	0.14	0.09
20	0.36	0.18	0.12
22	0.40	0.20	0.13
25	0.46	0.23	0.15
30	0.56	0.28	0.19
35	0.66	0.33	0.22
40	0.76	0.38	0.25

