

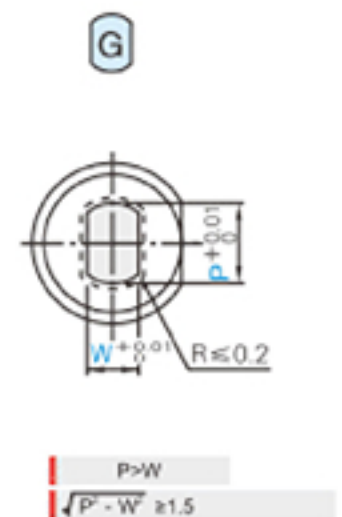
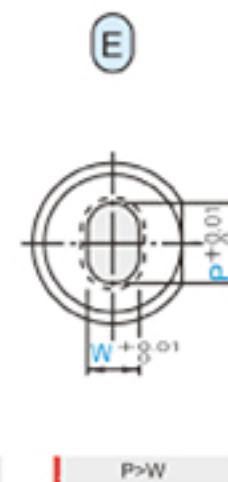
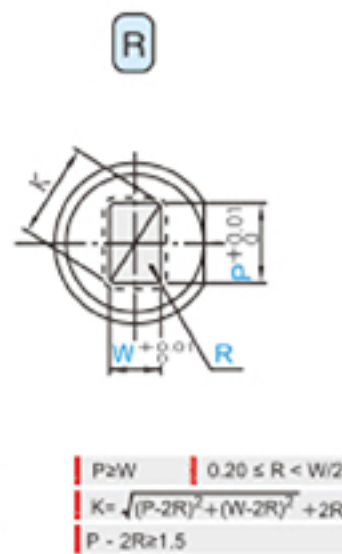
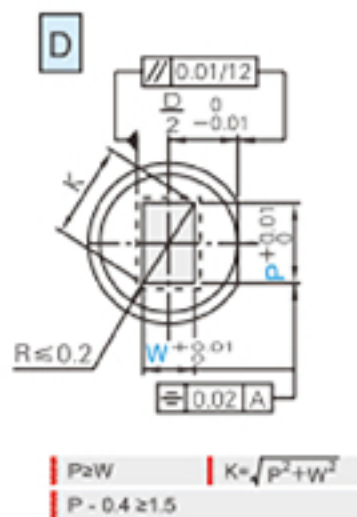


SR-WWAHD
SR-WWAHD□
SRA-WWAHD
SRA-WWAHD□

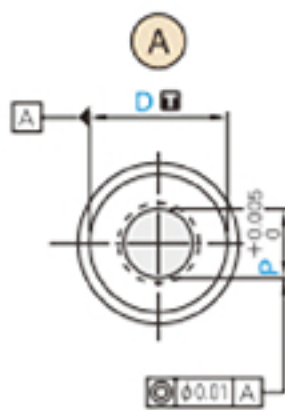

Catalog No.			
T	M	H	Type
D m5	V40(HIP)	87~88HRA	Ⓐ SR-WWAHD
			Ⓑ SR-WWAHD□
			Ⓐ SRA-WWAHD
			Ⓑ SRA-WWAHD□
D ^{+0.005} ₀			

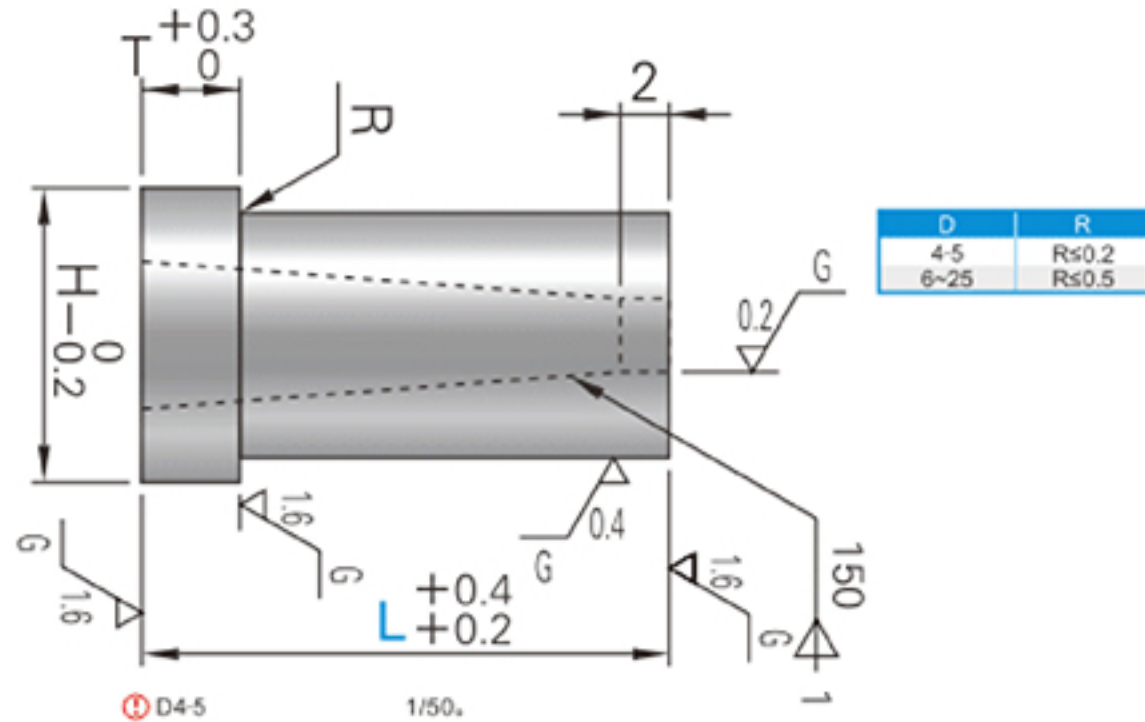

ORDER Catalog No. - L - P - W - R (R) - MT - C
SR-WWAHDR 13 - 25 - P6.20 - W2.00 - R0.20 - MT1.50 - C0.105

D	Catalog No.		L	(A)	D	E	R	G	R	MT	C	H	T
m5	Type			P	P-K max	P-Wmin			R				
+0.009 +0.004	(D m5)	(D ^{+0.005} ₀)	(4) (5) 6 8 10 13 16 (20) (25)	1.00 ~ 1.50 1.00 ~ 2.50 1.00 ~ 3.00 1.00 ~ 4.00 2.00 ~ 6.00 3.00 ~ 8.00 5.00 ~ 10.00 7.00 ~ 12.00 10.00 ~ 16.00	— — 3.00 4.00 6.00 8.00 10.00 12.00 16.00	— — 1.00 1.00 1.20 1.50 2.00 2.00 2.00			0.2 ~ W/2 (R)	MT ≥ 0.15 0.15mm	C ≥ 0.010 0.010mm	5 6 9 11 13 16 19 23 28	3 5

ⓘ D = (4)(5)

ⓘ L(30) ~ (35) → D8-25

C 

