
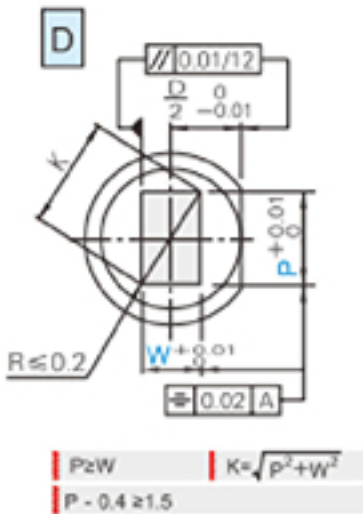
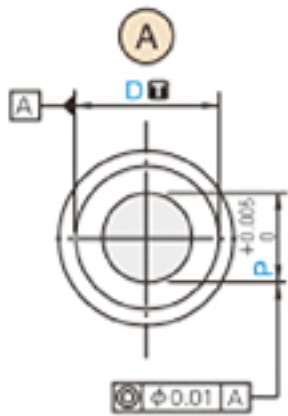
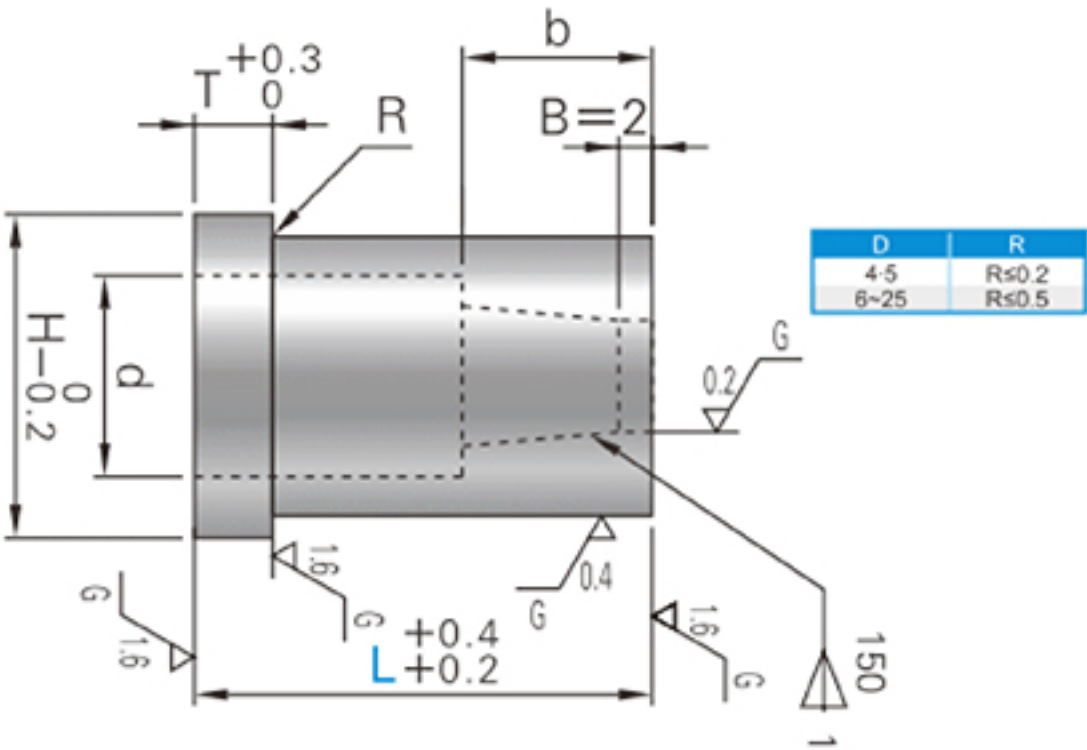


			Catalog No.
T	M	H	Type
D m5	V40(HIP)	87~88HRA	SR-WWHD
D ^{+0.005} / ₀			SR-WWHD □
			SRA-WWHD
			SRA-WWHD □

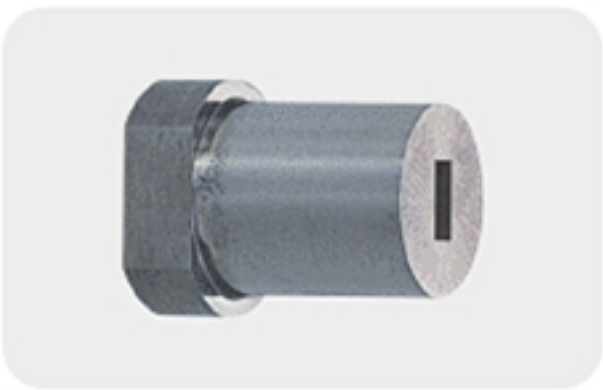

ORDER Catalog No. - L - P - W - R (仅R) - MT - C
SR-WWHDR 13 - 25 - P6.50 - W4.00 - R1.00 - MT1.50 - C0.105

D	Catalog No.		L	(A)	D	E	R	G	R	MT	C	b	d	H	T
m5	Type			P	P-K max	P-Wmin			R	(被加工板厚度)	(间隙)				
+0.009 +0.004	(D m5)	(D+0.005)	(4)	1.00 ~ 2.00	—	—				MT	C	2	2.4	5	3
			(5)	1.00 ~ 2.50	—	—			0.2	≥	≥	3	2.9	6	
	(A) SR-WWHD	SRA-WWHD	6	1.00 ~ 3.00	3.00	1.00			~	0.15	0.010	3	3.4	9	
+0.012 +0.006	(D) SR-WWHDD	SRA-WWHDD	8	1.00 ~ 4.00	4.00	1.00			W/2	请指定	请指定	4	4.4	11	
+0.015 +0.007	(R) SR-WWHDR	SRA-WWHDR	10	2.00 ~ 6.00	6.00	1.20			以下	0.15mm	0.010mm	6	6.4	13	
	(E) SR-WWHDE	SRA-WWHDE	13	3.00 ~ 8.00	8.00	1.50			仅 (R)	以上的被加工板材厚度。	以上的被加工板材厚度。		8.4	16	5
+0.017 +0.008	(G) SR-WWHDG	SRA-WWHDG	16	5.00 ~ 10.00	10.00	2.00						8	10.6	19	
			(20)	7.00 ~ 12.00	12.00	2.00							12.6	23	
			(25)	10.00 ~ 16.00	16.00	2.00							16.6	28	

① D = (4)(5)
① MT
① L(30) • (35) ... D8~25 (30) • (35) D8~25

C(间隙) 

