



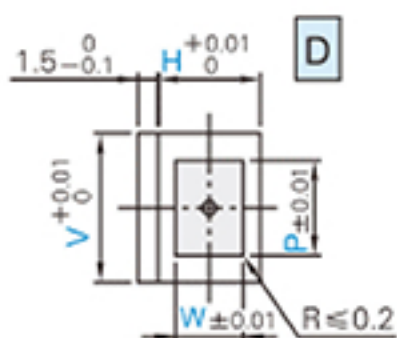
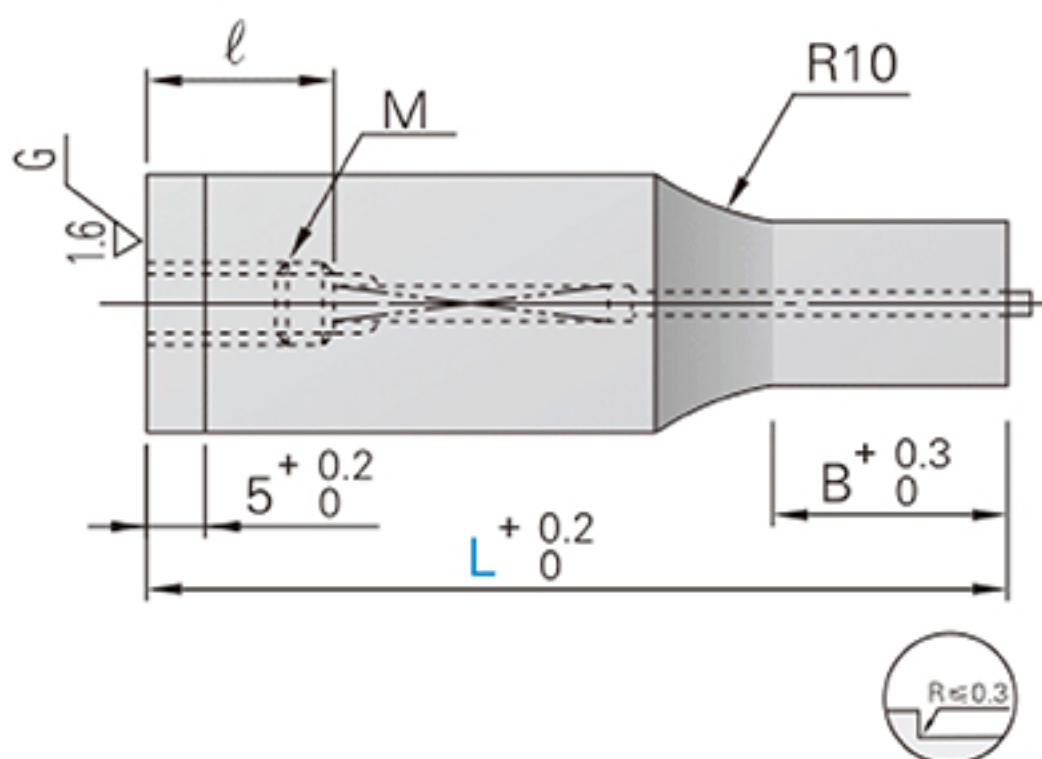


-WPC®

W-WHJF
W-WHSJF
W-WPHJF

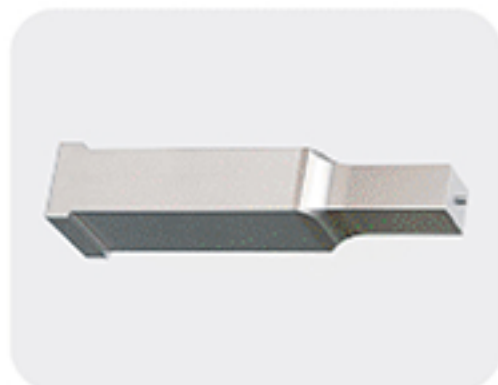

WSP

WSP



WSP

W<P

0.15 ≤ R < W/2 0.01mm

P=V, W=H

M	H	WPC® 1000~1100HV	Catalog No.	
			(B) (L>S)	
SKD11 SKH51	60~63HRC 61~64HRC 64~67HRC	W-WHJF W-WHSJF W-WPHJF	D R E G	S L



H	Z
6-8	1.0
10-13	1.5
16-25	2.0



A	 ORDER	Catalog No. - V - H - L - P - W - R (R) - F									
		W-WHSJFDL - 16 - 13 - 60 - P15.00 - W12.00 - F90									
B	 ORDER	Catalog No. - V - H - L - P - W - R (R) - F - X - Y									
		W-WHSJFDL - 16 - 13 - 60 - P15.00 - W12.00 - F90 - X0.00 - Y0.55									

Catalog No.			V H W P_{min}												L	B		M	ℓ
Type			3.0	3.0	4.0	5.0	7.0	8.0	9.0	10.0	12.0	12.0							
W-WHJF W-WHSJF W-WPHJF			6	2.0	○	○	○	○	○	○	○	○	○	(40) (50) 60 70 80	8	13	4	12	
			8	2.5		○	○	○	○	○	○	○	○		13	19	5		
			10	3.0			○	○	○	○	○	○	○				6		
			13	4.0				○	○	○	○	○	○						
			16	5.0					○	○	○	○	○						
			20	6.0						○	○	○	○		○				
			22	6.0							○	○	○		○				
			25	6.0								○	○		○				
Ⓢ L(40)B = 6 Ⓢ L(50) • H10-25B = 13																			

