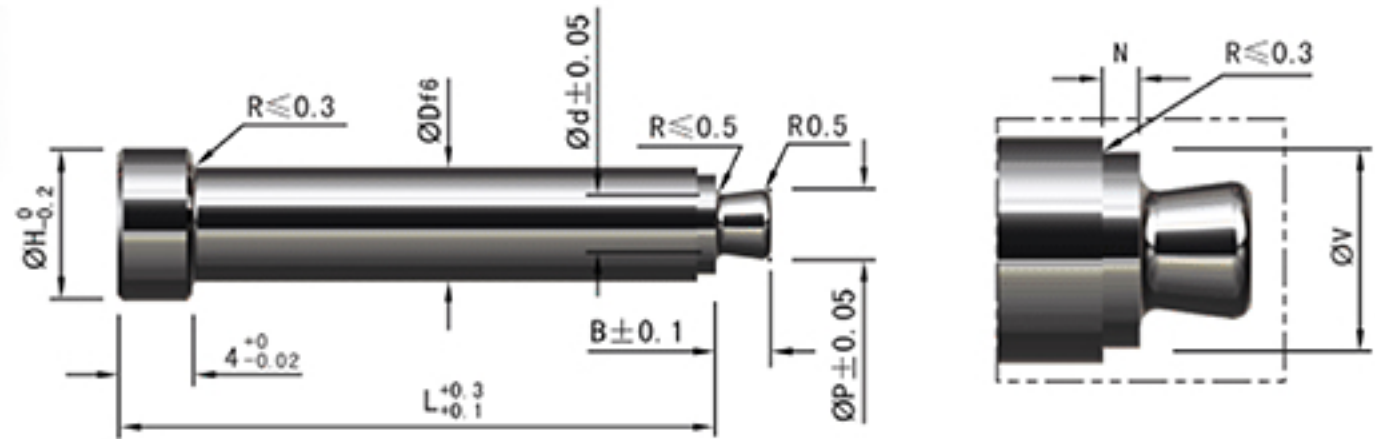


RRLRSBF

**Features:**

1. Lock section is designed to have a straight step in order to prevent runner from chipping, which occurs in molding of hard resin, resin with glass fiber and etc.

Order RRLRSBF-D-L-P-d-B-N **M** :SKH51 **H** : 58-60HRC

Code	D	H	V	0.1mm			
				P	d	B	N
RRLRSBF	2	4	1.8	0.9-1.8	0.8-1.7	1.5-3	0.5-1
	3	5	2.8	0.9-2.8	0.8-2.7	1.5-3	
	4	6	3.8	1.1-3.8	1 -3.7	1.5-3.8	
	5	7	4.6	1.3-4.6	1.2-4.5	1.5-4.5	
	6	8	5.6	1.6-5.6	1.5-5.5	1.5-4.5	

D	@ ¥/P 0.1mm												
	L14	L19	L25	L30	L35	L40	L45	L50	L60	L70	L80	L90	L100
2													
3													
4													
5													
6	-												



Installation Diagram:

