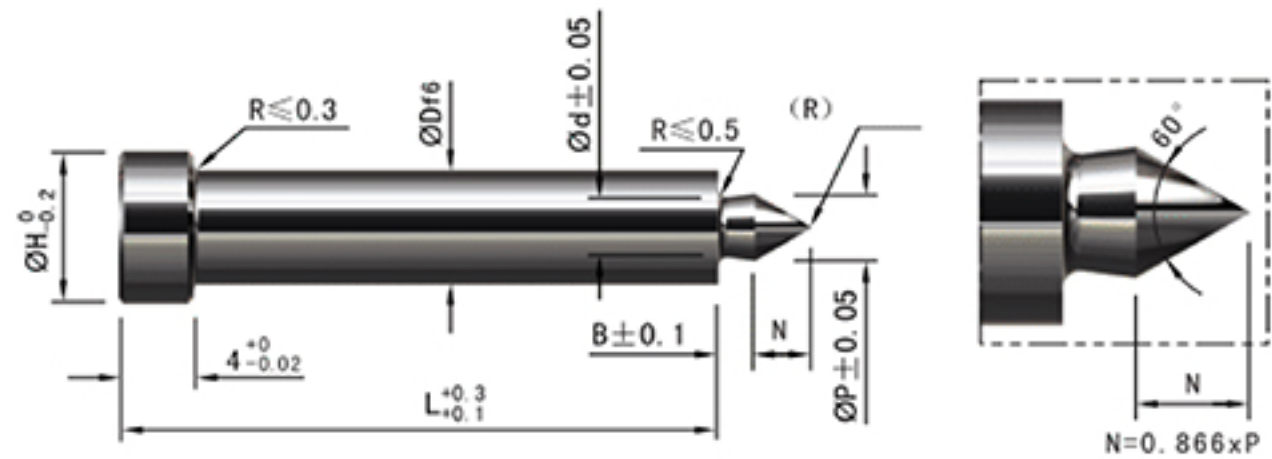


**RRLKB  
RRLKG**
**Features:**

1. The runner cooling efficiency is improved and pull-out failure is prevented.

**Installation Guidelines:**

- Effective when runner is thick or when cooling is difficult.

**Order** RRLKB-D-L-P-d **M** :SKH51 **H** :58-60HRC

Code	D	H	B	0.1mm	
				P	d
RRLKB	2	4	2	0.9-1.9	0.8-1.8
	3	5		0.9-2.9	0.8-2.8
	4	6	2.5	1.1-3.9	1 -3.8
	5	7		1.3-4.9	1.2-4.8
	6	8	3	1.6-5.9	1.5-5.8
	8	10	4	2.1-7.9	2 -7.8
	10	13	5	2.6-9.9	2.5-9.8

D	@ ¥/P 0.1mm												
	L14	L19	L25	L30	L35	L40	L45	L50	L60	L70	L80	L90	L100
2	-												
3													
4													
5													
6													
8													
10													

**Order** RRLKG-D-L-P-d **M** :SKH51 **H** :58-60HRC

Code	D	H	B	0.1mm	
				P	d
RRLKG	2	4	2	0.9-1.9	0.8-1.8
	3	6		0.9-2.9	0.8-2.8
	4	7	2.5	1.1-3.9	1 -3.8
	5	8		1.3-4.9	1.2-4.8
	6	9	3	1.6-5.9	1.5-5.8
	8	11	4	2.1-7.9	2 -7.8
	10	15	5	2.6-9.9	2.5-9.8

D	@ ¥ / P 0.1mm												
	L14	L19	L25	L30	L35	L40	L45	L50	L60	L70	L80	L90	L100
2													
3													
4													
5													
6													
8	-												
10													

