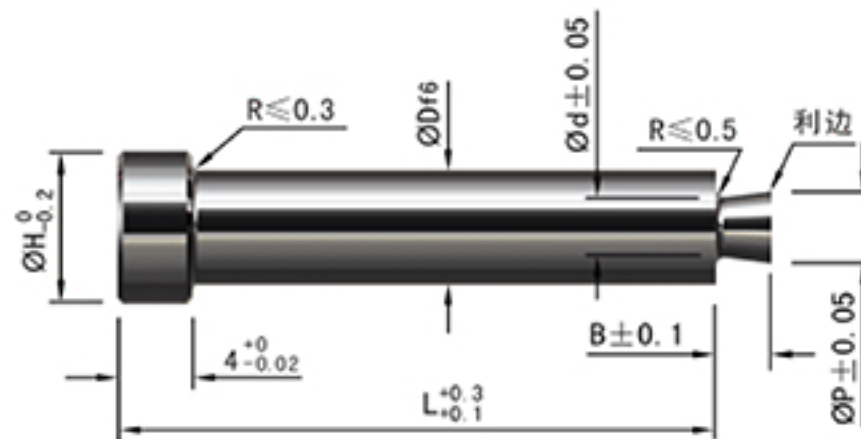


**RRLREB
RRLREBF**

Installation Guidelines:

- Useful for soft resin, such as thermoplastic elastome (TPE), liquid silicone rubber (LSR) and etc. requiring strong runner lock.
- Suitable for the soft resin runner maintenance, for the tip of lock is a sharp corner.

Order RRLREB-D-L-P-d **M** :SKH51 **H** : 58-60HRC

Code	D	H	B	0.1mm	
				P	d
RRLREB	2	4	2	0.9-1.9	0.8-1.8
	3	5		0.9-2.9	0.8-2.8
	4	6	2.5	1.1-3.9	1 -3.8
	5	7	3	1.3-4.9	1.2-4.8
	6	8		1.6-5.9	1.5-5.8
	8	10	4	2.1-7.9	2 -7.8

D	@ ¥/P 0.1mm												
	L14	L19	L25	L30	L35	L40	L45	L50	L60	L70	L80	L90	L100
2													
3													
4													
5													
6	-												
8													

Order RRLREBF-D-L-P-d **M** :SKH51 **H** : 58-60HRC

Code	D	H	0.1mm		
			B	P	d
RRLREBF	2	4	0.8-3	0.9-1.9	0.8-1.8
	3	5		0.9-2.9	0.8-2.8
	4	6	1.3-3.8	1.1-3.9	1 -3.8
	5	7	1.5-4.5	1.3-4.9	1.2-4.8
	6	8		1.6-5.9	1.5-5.8
	8	10	2 -6	2.1-7.9	2 -7.8

D	@ ¥/P 0.1mm												
	L14	L19	L25	L30	L35	L40	L45	L50	L60	L70	L80	L90	L100
2													
3													
4													
5													
6	-												
8													

