




DTPGA

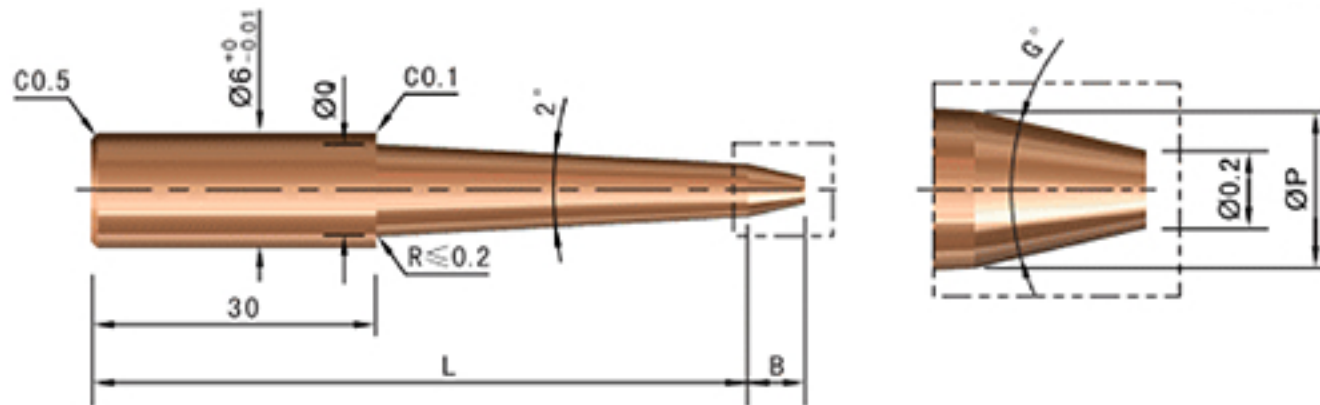

This electrode is designed for a 0.15mm discharge gap on each side.
 P dimension is 0.3mm less than normal diameter (No).

Order DTPGA-No-L-G **M** Copper

No.	Q			B				
	L50	L70	L90	G20	G30	G40	G50	G60
1.2	1.6	2.3	-	1.99	1.31	0.96	0.75	0.61
1.5	1.9	2.6	-	2.84	1.87	1.37	1.07	0.87
2	2.4	3.1	3.8	4.25	2.8	2.06	1.61	1.3
2.5	2.9	3.6	4.3	5.67	3.73	2.75	2.14	1.73
3	3.4	4.1	4.8	7.09	4.67	3.43	2.68	2.17
3.5	3.9	4.6	5.3	8.51	5.6	4.12	3.22	2.6
4	4.4	5.1	5.8	9.92	6.53	4.81	3.75	3.03

Code	No.	P	G°	@ ¥ / P		
				L50	L70	L90
DTPGA	1.2	0.9	20			
	1.5	1.2				
	2	1.7				
	2.5	2.2				
	3	2.7				
	3.5	3.2				
	4	3.7				

Example:

