




SSGA

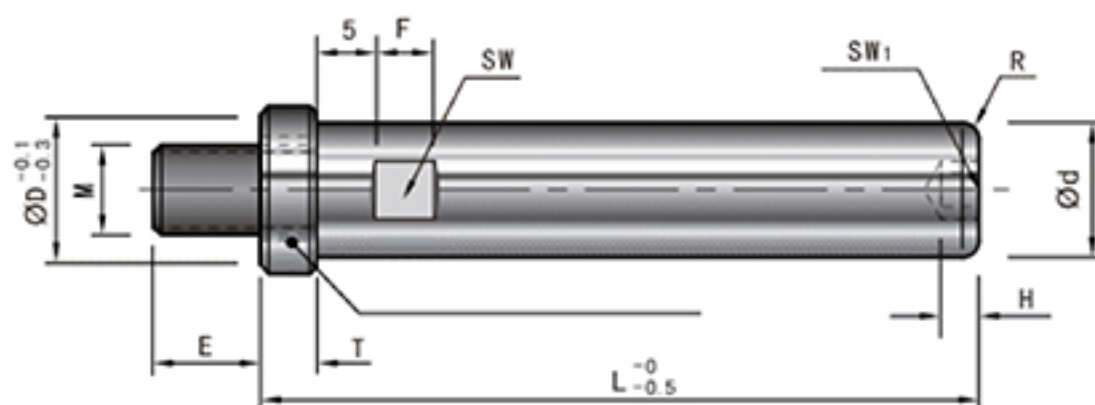


1. SSGA-7~12.5 20. SSGA-13.5~16 20~25, SSGA17.5~27.5 size 30~35not processing.
2. SSGA-13.5~33 size:5mm(L=25、35、45...), T and E size wrench groove.
3. When use it with square spring, please refer to max out diameter size.

Order SSGA-D-L M :S45C H :20-25HRC

D	d	E	H	F	R	T	SW	SW1	M			
7		7			1	3	4	3	M 4×0.7	Ø14	Ø14	Ø15
8	6		3							Ø16	Ø16	Ø20
9		8		8	1.5	4	6	4	M 5×0.8	Ø18	Ø18	-
10												
11	10	10			2							
12.5			4									
13.5				10	2.5							
15	13	17										
16												
17.5			5	12		5						
19	16	20										
20												
22			6	14	3							
25	20	23										
27.5												
30			8	16			22	14	M16×2	Ø60		
33	25	27										



Installation diagram: Use wrench bit or hex holes tight latch guide pin.

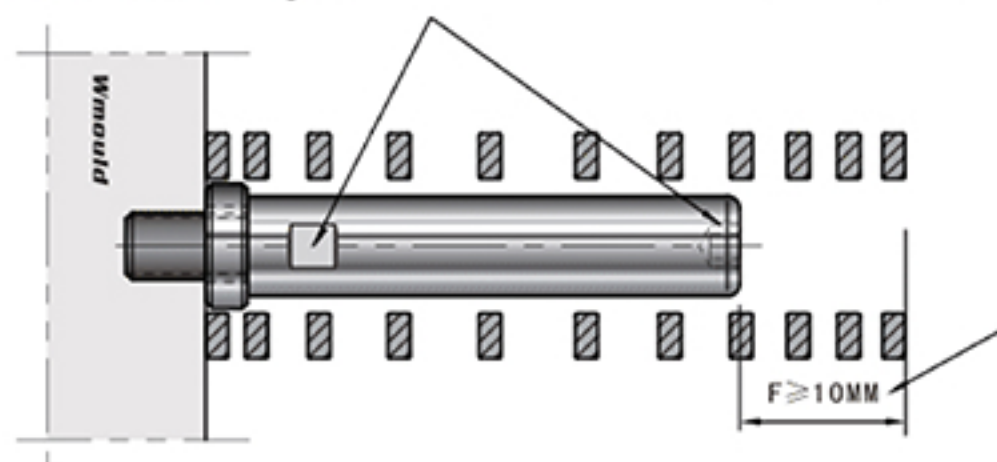

The bottom of springs to end face of guide pin shall be reserved $\geq 10\text{mm}$ safety length.

