



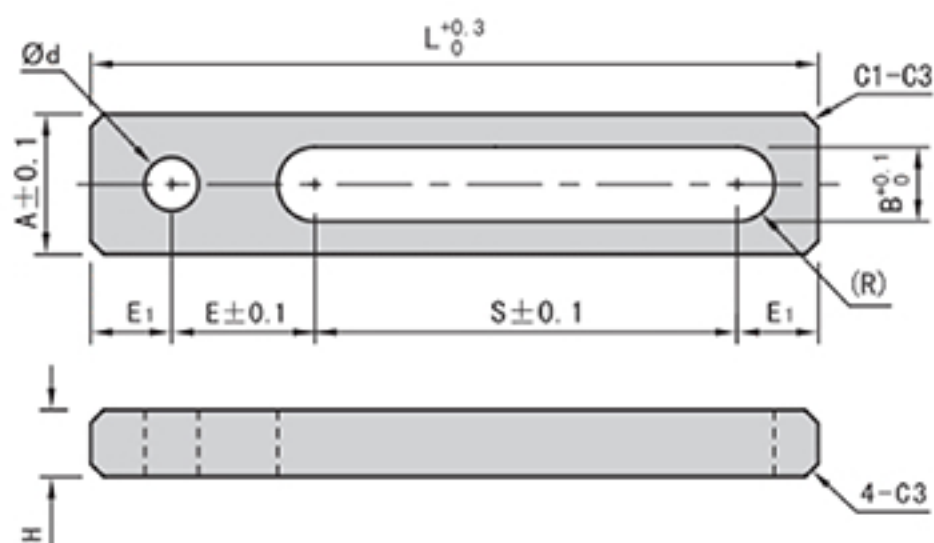


TTLNH


 Order TTLNH-A-S  :S45C

A	S	H	B	E	E1	L	d	@ ¥/P
19	50-270	16	11	20	14.5	S+49	10.5	
25			14	23	17	S+57	13.5	
32	80-300		17	30	18.5	S+67	16.5	
38	100-350		21	33	20.5	S+74	20.5	



Installation Diagram:

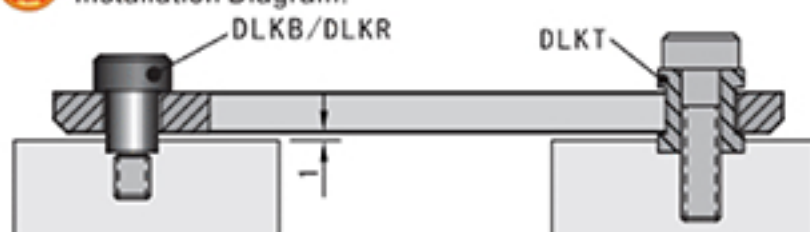**Installation Guidelines:**

- Allows have 1mm clearance on installation, in order to prevent friction between tension links and mold plate. (As shown in the left)