



- WPC
- W-WMP
- AW-WMP
- W-WMPH
- AW-WMPH

–HW
HW-WMPH
AHW-WMPH


-HX
HX-WMPH
AHX-WMPH

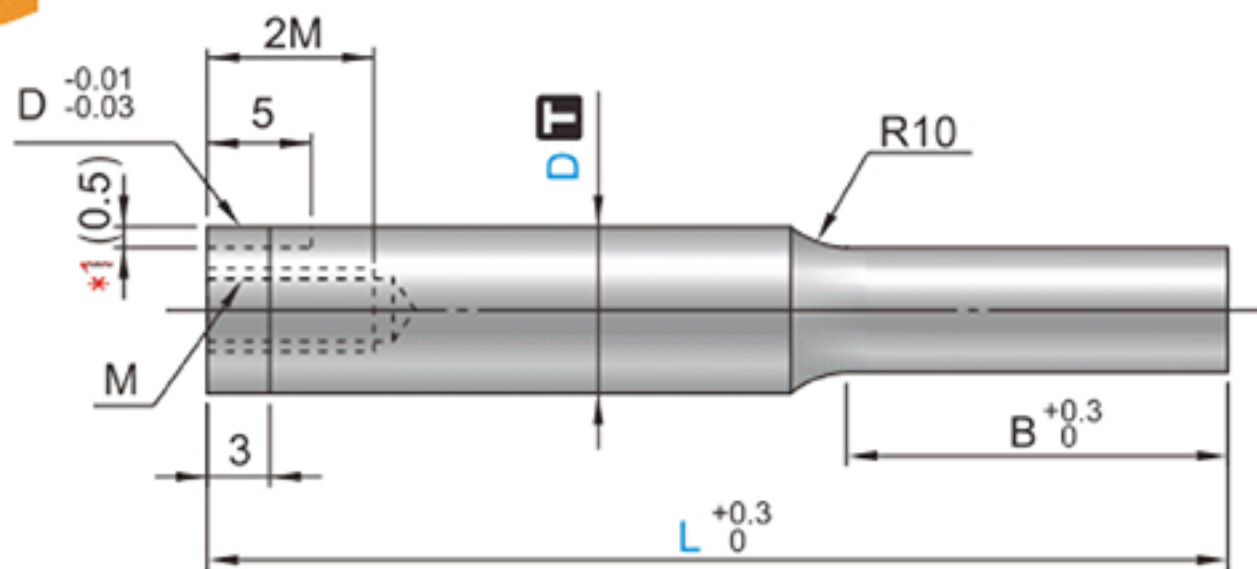

④ $D=5$

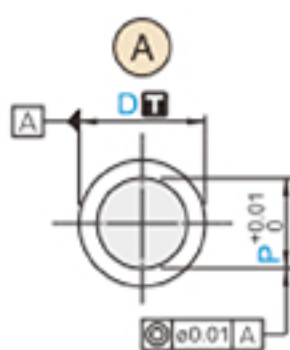

$$\star \begin{pmatrix} D=5 \\ D/2-0.5, 0, 0.01 \end{pmatrix}$$

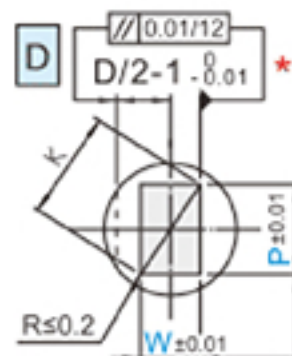


$$P_2W \quad K = \sqrt{P^2 + W^2}$$



$$K = \sqrt{(P-2R)^2 + (W-2R)^2} + 2R$$



P>W



P>W

			Type				(B) (X>L>S)
T	M	H	WPC 1000~1100HV	HW 3000HV	HX 3000HV		
D m5	SKD11	60~63HRC 64~67HRC	W-WMP W-WMPH	— HW-WMPH	— HX-WMPH	A D R E G	S L X
D +0.005 0	SKD11	60~63HRC 64~67HRC	AW-WMP AW-WMPH	— AHW-WMPH	— AHX-WMPH		

 **ORDER**

Catalog No. - L - P - W - R (**R**)
AW-WMPDL 13 - 80 - P10.50 - W7.34

Catalog No.			D	L	(A)	(D)	(E)	(R)	(G)	(R)	B	M
Type					P	P·K max.	P·Wmin.	R				
(D m5) -WPC W-WMP W-WMPH		(A)	5	40 · 50 · 60 · 70 · 80	2.00~ 4.99	4.97	1.20	0.15 ~ W/2	(R)		8	3
			6		2.00~ 5.99	5.97	1.50					
			8	(40)· 50 · 60 · 70 · 80 · 90 · 100	3.00~ 7.99	7.97	2.00				13	4
			10		3.00~ 9.99	9.97	2.50					
			13		6.00~12.99	12.97	3.00					
			16		10.00~15.99	15.97	4.00				19	6
			20		13.00~19.99	19.97	5.00					
25	18.00~24.99	24.97	6.00									
-HW HW-WMPH -HX HX-WMPH		(D)	5	50 · 60 · 70 · 80	2.00~ 4.99	4.97	2.00				13	3
			6	50 · 60 · 70 · 80 · 90 · 100	2.00~ 5.99	5.97	2.00					
			8		3.00~ 7.99	7.97	2.50				19	4
			10		3.00~ 9.99	9.97	2.50					
			13		6.00~12.99	12.97	3.00				25	6
			16		10.00~15.99	15.97	4.00					
			20	60 · 70 · 80 · 90 · 100	13.00~19.99	19.97	5.00					
25	18.00~24.99	24.97	6.00									
(D ^{+0.005} ₀) -WPC AW-WMP AW-WMPH		(E)	5	60 · 70 · 80	2.00~ 4.99	4.97	3.50				25	3
			6	60 · 70 · 80 · 90 · 100	2.00~ 5.99	5.97	3.50					
			8		3.00~ 7.99	7.97	5.00				30	4
			10		3.00~ 9.99	9.97	5.00					
			13		6.00~12.99	12.97	5.00				40	6
			16		10.00~15.99							
			-HW AHW-WMPH -HX AHX-WMPH			20	70 · 80 · 90 · 100					
25	18.00~24.99											

① L(40) ***B=8

⚠ L(40) ***B=8

■ Fastening method of punch:

- 1、Punch fixed plate benchmark: This method is the most common method and should not be used for molds with small gaps.
(The punch is driven into the punch fixing plate, so the mold production is very simple. If the coaxiality of the punch and the hole processing accuracy of the punch fixing plate are low, the gap between the punch and the die is prone to unevenness, so it should not be used for molds with small gaps.)
- 2、Unloading plate benchmark: This method is mainly used for high-precision molds of thin plates.
(On the discharge plate close to the male mold and the female mold, the blade of the male mold has a guide device, so the accuracy error can be kept to a minimum. The punch fixing plate is fastened by fitting the gap.)

